


How to Configure an ISP with Static IP Addresses

<https://campus.barracuda.com/doc/48203213/>

If your Internet connection is using static IP addresses or entire network ranges assigned by your ISP, you must create routing entries on box level and then assign the IP address(es) to the virtual server. Choose the network type **Untrusted** to automatically create a default route (0.0.0.0/0) for the connection.

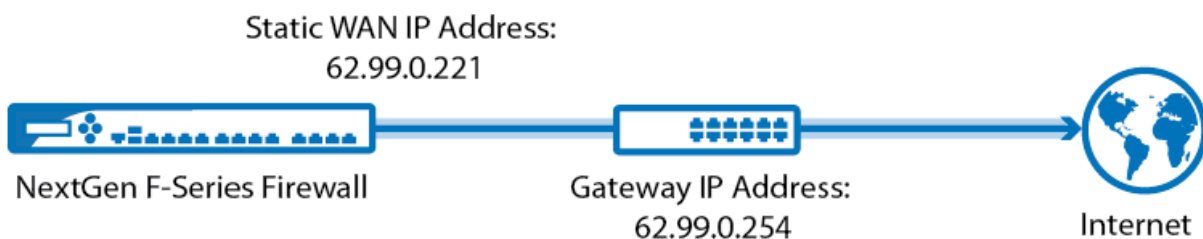

Before you begin

Connect the network equipment installed by your provider to an unused port (not the management port) of your Barracuda NextGen Firewall F-Series.

Step 1. Add a direct route

Create a direct attached route entry to create the network on box level of the Barracuda NextGen Firewall F-Series. Be sure to create the route on the port the ISP is plugged into.

1. Go to **CONFIGURATION > Configuration Tree > Box > Network**.
2. In the left menu, select **Routing**.
3. Click **Lock**.
4. In the **Main Routing Table**, click + to add a new route.
5. Enter a **Name** for the route and click **OK**.
6. In the **Target Network Address** field, enter the IP address of the target network. E.g.,:
62.99.0.0/24
7. Select **directly attached network** as the **Route Type**.
8. From the **Interface Name** list, select the port the ISP is connected to. E.g.,: **port 2**.
9. If the default route will be introduced in an environment where multiple dynamic links are

available, specify a **Route Metric**.

10. Select **Untrusted** as the **Trust Level**.
11. Enter the **Default Gateway** IP address. E.g.,: 62.99.0.254
12. Click **OK**.
13. Click **Send Changes** and **Activate**.

Step 2. Network activation

After you create or change basic network configurations such as routing, you must activate your new network configurations.

1. Go to **CONTROL > Box**.
2. In the left menu, expand the **Network** section and click **Activate new network configuration**.
3. Select **Failsafe**.

Your route is now displayed as a disabled route (grey X icon) in **CONTROL > Network**.

Step 3. Add the static IP address to a virtual server

Assign the individual WAN IP addresses you want to use to the virtual servers on the Barracuda NextGen Firewall F-Series. By introducing the external IP addresses on the virtual server, you can use a [high availability \(HA\) cluster](#) to transfer the WAN address to the secondary unit and still be reachable under the same IP address. In our example, you would enter 62.99.0.221 in the virtual **Server Properties (CONFIGURATION > Full Configuration > Virtual Servers > your virtual server)** as the **First-IP**, **Second-IP** or **Additional IP** address.

For more information, see [Virtual Servers and Services](#).

Verify the network configuration

Open the [CONTROL > Network](#) page to verify that all network routes have been introduced successfully. Verify the WAN IP addresses are displayed with a green status icon and that the introduced routes are available in the tables Main and Default and that the default route is directing traffic through your ISP connection.

COCKPIT CONFIG **CONTROL** FIREWALL VPN LOGS STATISTICS AUDIT EVENTS SSH

Server **Network** Resources Licenses Box Sessions

Interface/IP	Label	Ping	MAC of duplicate IP	Info
dhcp				
port1, Speed=1000Mb/s, Duplex=Full				
10.0.8.220/24	mip0	ok	-	
10.0.8.221/32	S1	ok	-	
port2, Speed=1000Mb/s, Duplex=Full				
62.99.0.221/32	S1	ok	-	
port3, Speed=1000Mb/s, Duplex=Full				
172.16.0.221/32	S1	ok	-	
lo				
pvpn0				
tap0				
tap1				
tap2				

Interfaces/IPs | IPs | Interfaces | Proxy ARPs | ARPs | Statistics | OSPF | Switch Info

TABLES

Table / Src Filter	State	Type	Interface	Src IP	Pref	Gateway	Name
Table vprnlocal, From all							
Table dhcp1, From 0.0.0.0							
Table main, From all							
10.0.8.0/24	up	direct-boot	port1	10.0.8.220	0	-	boxnet
127.0.1.0/24	up	direct-kernel	tap0	127.0.1.1	0	-	
127.0.2.0/24	up	direct-kernel	tap1	127.0.2.1	0	-	
127.0.3.0/24	up	direct-kernel	pvpn0	127.0.3.1	0	-	
127.0.3.0/24	up	direct-kernel	tap2	127.0.3.1	0	-	
172.16.0.0/24	up	direct-boot	port4	172.16.0.221	0	-	DMZ-direct
62.99.0.0/24	up	direct-boot	port2	62.99.0.221	0	-	ISP1
Table default, From all							
0.0.0.0/0	up	gateway-boot	port2	62.99.0.221	100	62.99.0.254	default-isp1

Figures

1. static_wan.png
2. routing_static.PNG

© Barracuda Networks Inc., 2019 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.