

FSC Link Selection

<https://campus.barracuda.com/doc/49743424/>


Link selection allows you to configure a fallback connection for your Secure Connector. When the primary interface is down, traffic is routed over the backup interface to the Secure Access Concentrator. By default, the gateway of the interface is probed every five seconds, but you can also configure an explicit probing target.

Before you begin

Configure two WAN connections for the FSC. For more information, see [FSC WAN Connections](#).

Configure FSC link selection

1. Go to **your cluster > Cluster Settings > Secure Connector Editor**.
2. Click **Lock**.
3. Double-click to edit the device or FSC template.
4. In the left menu, click **Routing Settings**.
5. In the **Link Selection** section, click the **Enable Link Selection** check box.
6. From the **Primary Interface** list, select the default connection.
7. From the **Backup Interface** list, select the backup connection.
8. (optional) Enter an IP address reachable through the primary interface as the **Explicit Probing Target**.

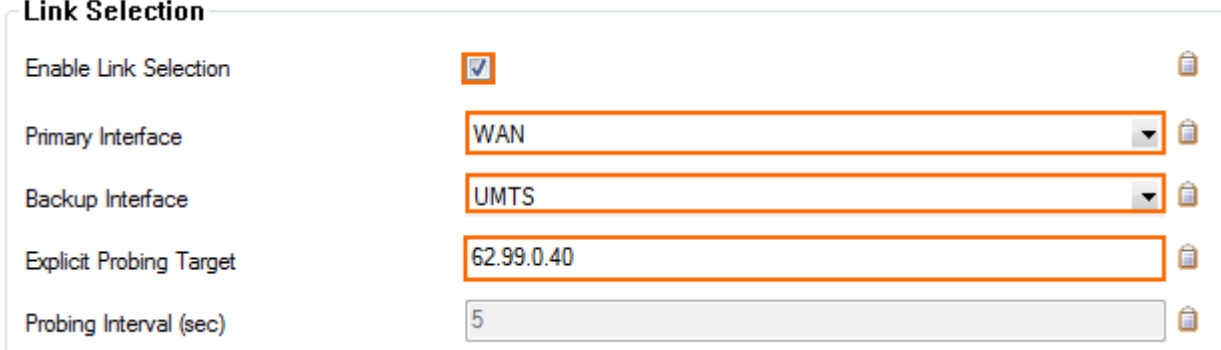

Link Selection	
Enable Link Selection	<input checked="" type="checkbox"/>
Primary Interface	WAN
Backup Interface	UMTS
Explicit Probing Target	62.99.0.40
Probing Interval (sec)	5

9. Click **OK** and **Activate**.

Figures

1. sc_link_selection.png

© Barracuda Networks Inc., 2019 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.