

MDaemon Messaging Server Deployment

<https://campus.barracuda.com/doc/12190600/>


This article refers to the Barracuda Message Archiver firmware version 5.0 and higher, and the MDAemon Messaging Server.

Use the following steps to configure an MDAemon Messaging Server to forward a copy of all incoming and outgoing messages to the Barracuda Message Archiver.

1. From the MDAemon menu bar, click the **Setup** menu, and click **Default Domain / Servers** domain:

Setup	
Default Domain / Servers...	F2
Extra Domains...	Alt+F2
Web, Sync, & IM Services...	Ctrl+W
Event Scheduling...	Ctrl+E
BlackBerry...	Alt+B
Preferences...	Ctrl+O

2. In the **Default Domain & Servers** dialog box, click **Archiving**, and then:
 - Select **Send copies of all inbound and outbound mail to these addresses** and enter the email address of your Barracuda Message Archiver in the associated field, for example, **archiver@192.168.200.200<mailto:archiver@192.168.200.200>**
 - Select **Archive inbound mail**
 - Select **Archive outbound mail**
 - Select **Include local mailing list messages**
 - Select **Include MultiPOP collected messages**
 - (Optional) Select **Insert "(Archive Copy)" into message Subject header**

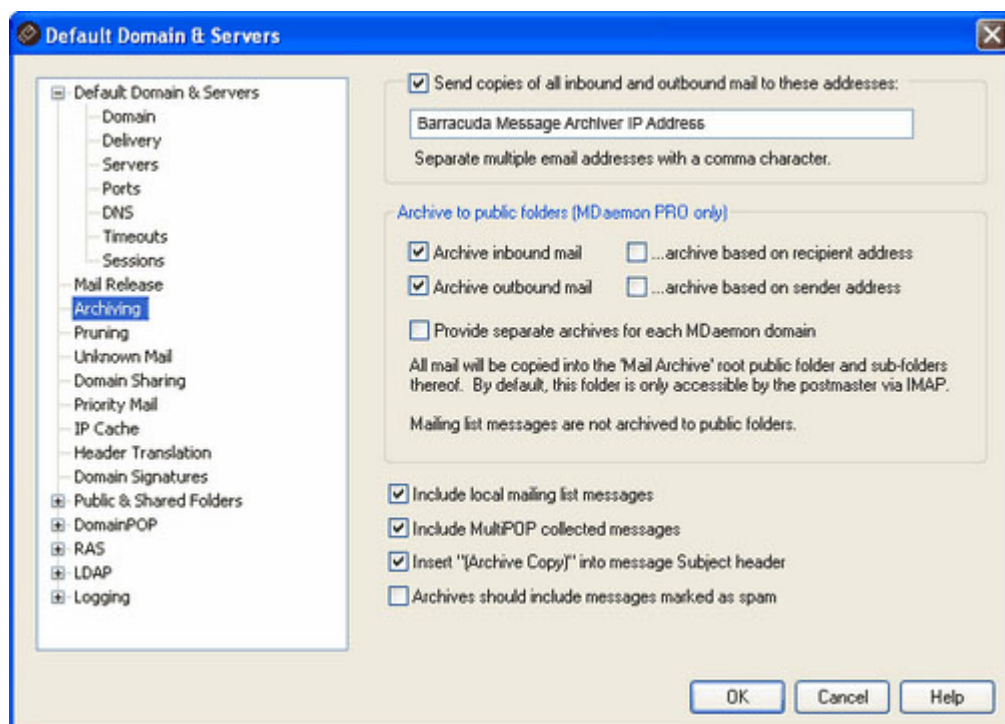

3. Click **OK** to save your changes.

Figures

1. seutp.jpg
2. archiving.jpg

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.