
How to Assign and Activate Single Licenses on a Control Center

<https://campus.barracuda.com/doc/46209329/>

You can activate single licenses for managed Barracuda NextGen F-Series Firewalls on the NextGen Control Center. After activation the licenses are downloaded automatically. Activation can be done unattended or triggered manually by the administrator.

In this article

Before you Begin

- Make sure the Barracuda NextGen Admin can connect to the Internet. Barracuda NextGen Admin automatically downloads and installs the purchased license file from the licensing servers.
- Verify your data in the **Activation Template (Global Settings > CC Parameters)**.

Step 1. Enter the Product Type and Enable Configuration Updates

1. Go to **CONFIGURATION > Configuration Tree > Multi-Range > your range > your cluster > your NextGen Firewall F-Series > Box Properties**.
2. Click **Lock**.
3. Select your Barracuda NextGen Firewall F-Series model the **Product Type** and **Hardware Model** dropdown menus.
4. In the left menu, click **Operational**.
5. Set **Disable Box** to **no**.
6. Click **Send Changes** and **Activate**.


Step 2. Activate the Single License

Depending on the platform, you may be required to enter the serial number (for hardware), or the license token (for virtual and cloud).

Virtual F-Series Firewall or Control Center

Enter the license token to initiate the unattended or manual activation.

1. Log into the Control Center.
2. Go to **CONTROL > Barracuda Activation**.
3. Right click on the unlicensed NextGen Firewall F-Series in the **Single Licenses** section and click **Enter License Token**. The **Activate your Virtual Appliance** window opens.
4. Enter the license token you received when purchasing your License.

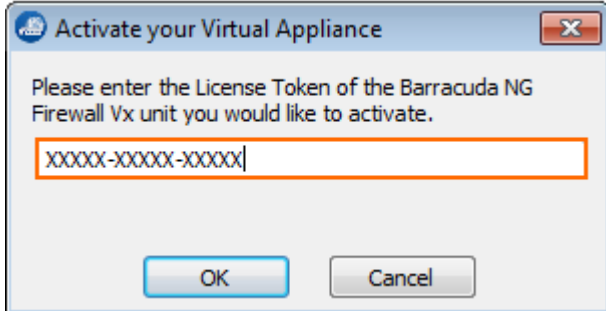

5. If the NextGen Firewall F-Series is not online yet, you must enter the MAC address. Alternatively connect the appliance to the Control Center first, then reenter the token.
6. If unattended activation is disabled, select the NextGen Firewall F-Series in the **Single Licenses** list and click **Activate**.

Hardware F-Series Firewall or Control Center

For hardware appliances you must activate the license. If the appliance is not already connected to the Control Center you must enter the serial number.

1. Log into the Control Center.
2. Go to **CONTROL > Barracuda Activation**.
3. Right click on the unlicensed NextGen Firewall F-Series in the **Single Licenses** section and click **Activate**. The **Activate your Virtual Appliance** window opens.
4. If the NextGen Firewall F-Series is not online yet, you must enter the serial number. Alternatively connect the appliance to the Control Center first.

If unattended activation is enabled, the licenses are downloaded and activated automatically. The form data configured in **Activation Template (Global Settings > CC Parameters)** is used to fill in the activation form. You can also manually trigger the activation.

Activation State	Box	Cluster	Range ID	Appliance	Serial	Location	Country	Info
Activated								
Activated	HQ-VF50-Single	DocHQ	1	VF50	222222		na	Licenses up to date

Figures

1. single_license01.png
2. single_license02.png

© Barracuda Networks Inc., 2020 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.