


Configuration Pages - Access and Controls

<https://campus.barracuda.com/doc/48202777/>

Expanding the configuration tree of the Barracuda NextGen Firewall F-Series and Control Center provides access to the configuration objects. Double-clicking a configuration object opens the configuration pages section where you can modify the settings, depending on the box or server service. Barracuda NextGen Admin offers a set of useful tools for editing configuration sections, referencing network objects, exporting configuration files, etc.

Configuration Pages

A configuration object consists of an expandable configuration tree containing further objects, depending on the server or service, and the configuration pages. When accessing a page, the **Configuration** menu on the left provides links to the configuration sub-pages, and the **Configuration Mode** menu lets you switch from simple to advanced page view.

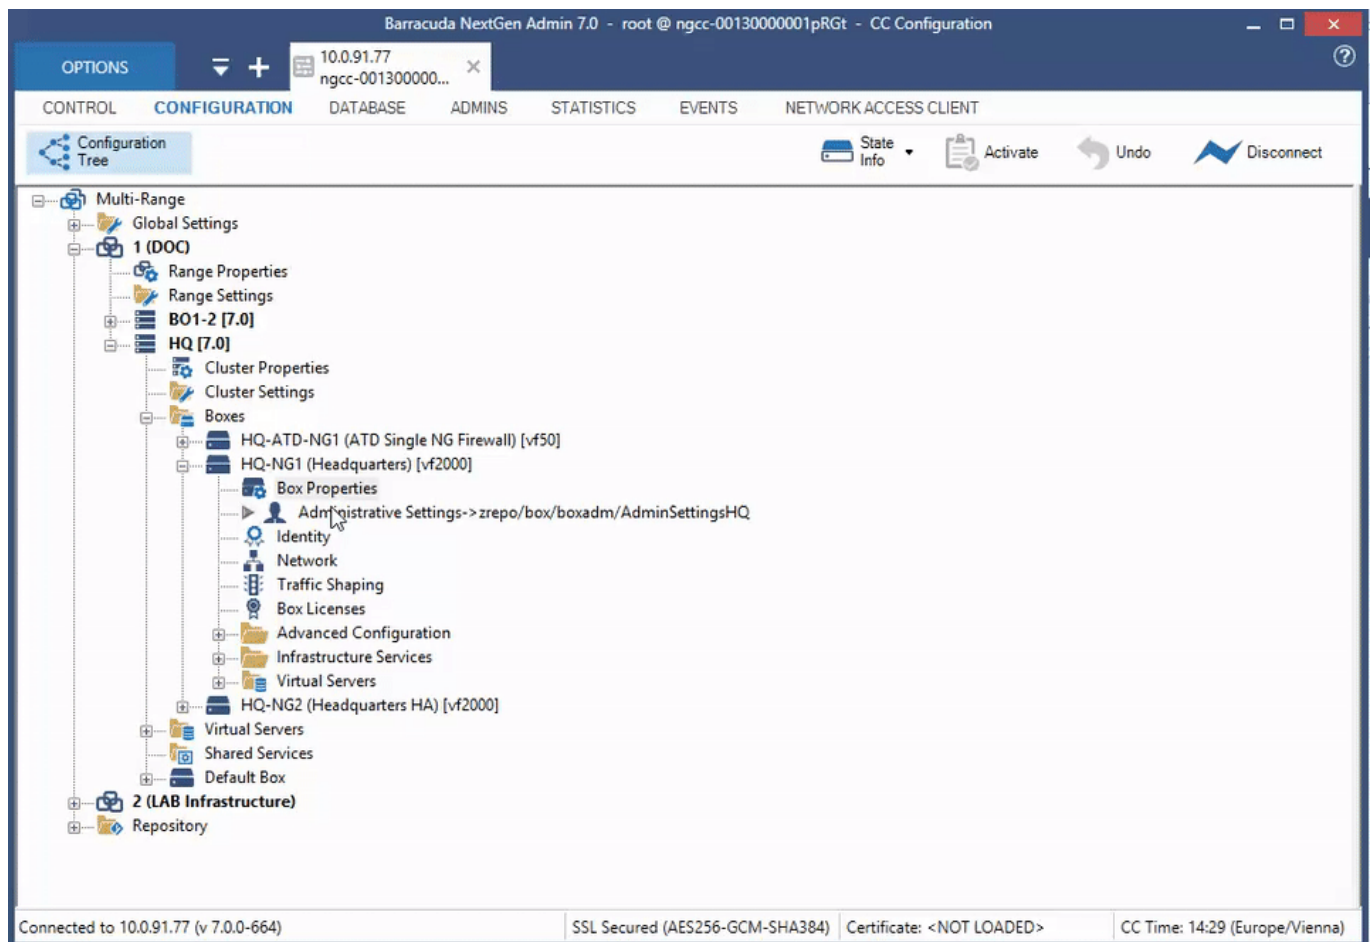


Every configuration page provides a set of editable sections, depending on the configuration

requirements. The Help section on the right displays a description of each parameter and explains its functionality. A configuration page can consist of the following components:

Fields

A common configuration field takes a single entry, but it can also display a read-only setting. Some fields offer a list of selectable items. This is indicated by a dropdown arrow on the right. You can also copy entries (see [Configuration Tools](#)) and replace or merge them with entries previously copied to the clipboard. Some lists have an **Other** checkbox following them. Check it to override the list and type in the value manually.

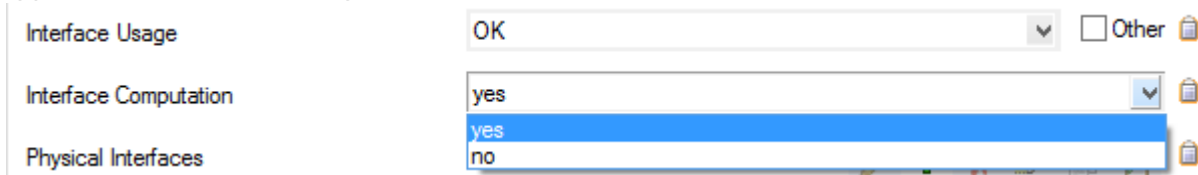


The screenshot shows three configuration fields:

- Interface Usage:** A dropdown menu with 'OK' selected, followed by an unchecked 'Other' checkbox and a clipboard icon.
- Interface Computation:** A dropdown menu with 'yes' selected, followed by a clipboard icon.
- Physical Interfaces:** A dropdown menu with 'yes' selected (highlighted in blue) and 'no' below it, followed by a clipboard icon.

Tables

Tables provide the option of adding and editing configurations (see [Configuration Tools](#)). When adding a configuration, pop-ups provide further options, such as entering name, description, settings etc. Configurations are then displayed in the table in descending order.

Physical Interfaces

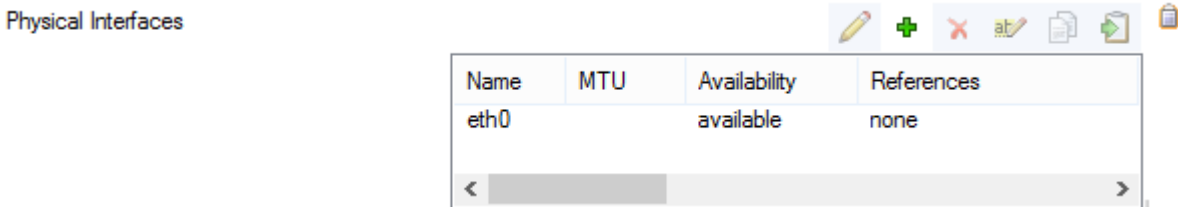

The screenshot shows a table with the following data:


Name	MTU	Availability	References
eth0		available	none

Below the table are navigation arrows (< and >). Above the table are icons for edit (pencil), add (+), delete (X), copy (document), and paste (document with arrow), along with a clipboard icon.

Lists

Lists provide the option of adding single configuration entries by entering or selecting them from a pop-up. Clicking the **Other** option, if present, lets you add an explicit entry.


Bundled Interfaces

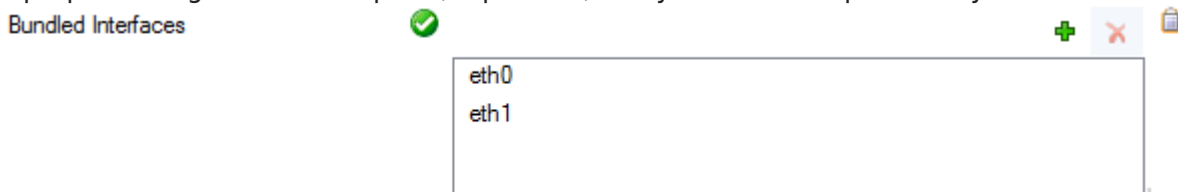

The screenshot shows a list configuration field with a green checkmark icon on the left and add (+), delete (X), and clipboard icons on the right. The list contains two entries: 'eth0' and 'eth1'.

On the Barracuda NextGen Control Center, some lists provide the option to reference global network objects that are available for use in the configuration.

This is indicated by an icon (see [Configuration Tools](#)).

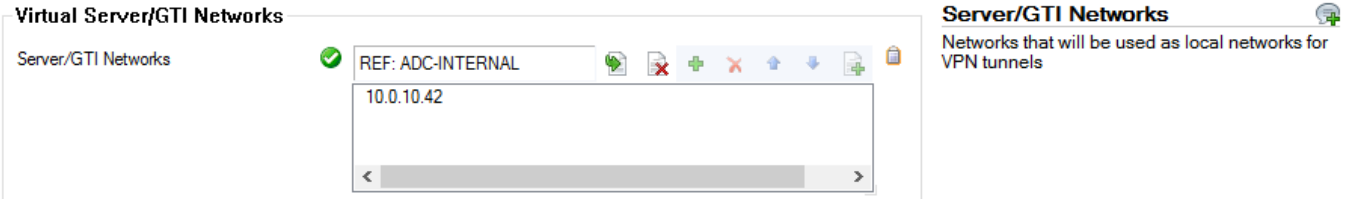


Clicking the **Set Reference** icon () opens a window that displays all valid single and referenced network objects that are available for use with the configuration.

The following network objects can be selected, if configured:

1. Cluster- and box-specific private and public IP addresses, networks and network ranges, virtual IP addresses, and public ISP addresses that are configured on managed Barracuda NextGen F Firewalls.
2. Cluster- and box-specific IP addresses and networks that contain a reference or are part of a reference chain.

Clicking the **Insert Reference** icon () opens a window that displays all valid single network objects that are available without an already existing reference.

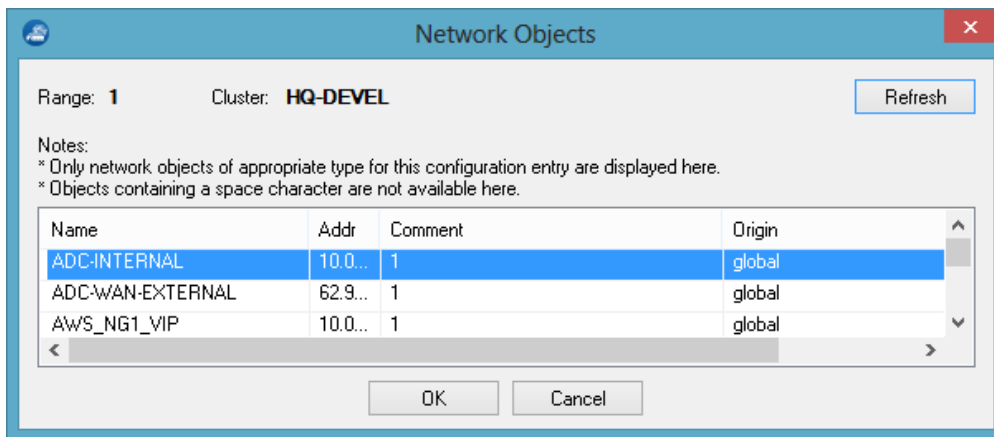













To insert a network object, select the desired entry and click **OK**.

Configuration Tools

To add and modify tables and list entries, use the icons on the configuration pages. Configuration options are indicated as follows:

Icon	Setting	Description
------	---------	-------------

	Copy to clipboard /../ Show Entry History	<p>This icon is available for all fields. It offers a context menu that allows interaction with the clipboard and provides a view of the file history. Copy an entry, table, or list configuration to the clipboard / replace or merge with the clipboard by selecting the following options.</p> <ul style="list-style-type: none"> • Copy to Clipboard - Copy a selected entry with the configuration properties to the clipboard. When you copy a setting, the configuration remains on the clipboard if not replaced by another copy. • Replace with Clipboard - Select this option to replace all the configuration settings to the state documented on the clipboard. Use this feature, for example, to revert a configuration entry or list to a previous working state. • Merge with Clipboard - Merge configuration entries with the clipboard when the clipboard contains additional settings. Entries on the clipboard are added to the present configuration together with their attributes, such as name, settings, etc. When merging entries from different releases, you must verify the working state by testing the configuration. • Show Entry History - Displays the RCS Report window with the configuration file history of the selected entry.
	Edit	Edit a configuration entry or section.
	Add	Add a new entry to a field, list, or table. <ul style="list-style-type: none"> • When adding an entry to a list, a field or list comes up asking for selection or further credentials. • When adding an entry to a configuration table, pop-ups provide further options, such as entering name, description, settings etc.
	Delete	Remove a selected entry.
	Rename	Rename a selected entry.
	Set Reference	Set a reference to a network object consisting of a cluster- or box-specific IP address or network that contains a reference or is part of a reference chain. When selected, the chain is displayed in the configuration as a list. When using this option, no further references can be added.
	Insert Reference	Set a reference to a single network object. This can be a cluster- or box-specific IP address, a network or network range, a virtual IP address, or a public ISP address that is configured on a managed Barracuda NextGen Firewall F-Series. This option allows you to create a list of referenced network objects.
	Remove Reference	Remove a reference that has been added by using the Set Reference option.
	Clone	Clone a selected entry. This option duplicates the configuration and adds it under the original entry. <ul style="list-style-type: none"> • When adding a cloned entry to the list, you must enter a unique name.
	Copy to clipboard	Copy a selected entry with the configuration properties to the clipboard.

	Select from list	Offers a list of selectable entries. Select an entry from the list and click OK .
	Up	Move an entry up in a list or table. Use this icon to sort list or table entries.
	Down	Move an entry down in a list or table. Use this icon to sort list or table entries.

Barracuda NextGen Admin Password Strength Policy

Some configurations require user credentials / passwords to be entered. Passwords can consist of small and capital characters, numbers, and non alpha-num symbols. When creating a password, Barracuda NextGen Admin combines the entry rating points and rates the password strength according to the entered characters.

Entry	Rating	Entry	Rating	Entry	Rating
length > 7	1 point	a capital character	1 point	a non alpha-num symbol	1 point
length > 15	2 points	2 different capital characters	2 points	2 different non alpha-num symbols	2 points
a small character	1 point	a digit	1 point		
2 different small characters	2 points	2 different digit	2 points		

Passwords are rated and displayed as follows:

New Root Password

✖ Current

New

Confirm

Strength Strong

Password Rating	Password Strength	Display Color
1 to 4 points	weak	red
5 to 7 points	medium	orange
8 to 9 points	strong	green
10 points	best	green

Figures

1. ConfigPages.gif
2. list01.png
3. table01.png
4. list02.png
5. net.png
6. ref01.png
7. net03.png
8. net01.png
9. clip.png
10. edit.png
11. add.png
12. del.png
13. rename.png
14. ref.png
15. net02.png
16. rem_ref.png
17. clone.png
18. copy.png
19. sel.png
20. up.png
21. down.png
22. pw_rate.png

© Barracuda Networks Inc., 2019 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.