

7.2.1 EA2 Migration Notes

<https://campus.barracuda.com/doc/77401899/>

Before migrating your CloudGen Firewall to 7.2.1 EA2, review the requirements and changes listed in the following sections. Some changes applied during the migration might require you to make preparations before the update or extra configurations after the update.

Migration Path to 7.2.1

You can upgrade to firmware 7.2.1 from the following firmware versions:

Current Version	Target Version
	7.2.1 EA2
6.0.0 - 6.0.7	Yes
6.1.0 - 6.1.3	Yes
6.2.0 - 6.2.4	Yes
7.0.0 - 7.0.3	Yes
7.1.0 EA - 7.1.2	Yes
7.1.3	No
7.2.0 EA1	Yes

Direct updating from firmware 5.x to 7.2.x is not possible.

For more information, see [Migrating from 5.4.x to 6.0.x](#).

Read the Release Notes, especially the Known Issues section, for the firmware version that you want to update to.

For more information, see [7.2.1 EA2 Release Notes](#)

Review Upgrade Requirements

Verify that your CloudGen Firewall or Control Center meets the upgrade requirements, and read the release notes for the firmware version.

Supported Models

You can upgrade the following CloudGen Firewall models to 7.2.1 EA2:

Barracuda CloudGen F-Series and Control Center Models	
Hardware Systems	F10 Rev B, F18 Rev A, F80 Rev A, F82 Rev A, F100 Rev A/B, F101 Rev A/B, F180 Rev A, F183 Rev A, F183R Rev A, F184R Rev A, F200 Rev A/B/C, F201 Rev A/B/C, F280 Rev A/B, F300 Rev A/B, F301 Rev A/B, F380 Rev A, F400 Rev A/B, F600 Rev A/B/C, F800 Rev A/B, F900 Rev A, F1000 Rev A, C400, C610
Virtual Systems	VF10, VF25, VF50, VF100, VF250, VF500, VF1000, VF2000, VF4000, VF8000, VC400, VC610, VC820
Public Cloud	AWS, Azure, Google Cloud
Standard Hardware Systems	
Standard Hardware	A standard hardware system is a Barracuda CloudGen Firewall F-Series running on 3rd-party server hardware using an SF license. Consult the Barracuda Networks Technical Support to find out if your specific standard hardware is supported.

Disk Space Requirements

To upgrade a system to version 7.2.1 EA2, you must have at least 50 MB of free space in the **/boot/** partition and at least 2.1 GB in the **/** (root) partition. If you are upgrading an F10 Rev B, F100, F100 Rev B, F101, or F101 Rev B, verify that enough disk space is available:

```
[root@F101:~]# df -h
Filesystem      Size  Used Avail Use% Mounted on
rootfs          3.8G  1.6G  2.1G  44% /
/dev/root       3.8G  1.6G  2.1G  44% /
/dev            470M   32K  470M   1% /dev
tmpfs           470M   8.0K  470M   1% /dev/shm
none            188M   16M  173M   9% /phionflash
cgroup_root     470M    0   470M   0% /sys/fs/cgroup
```

To free up disk space, download the following cleanup script, and apply it via remote execution to centrally managed firewalls. For standalone firewalls, the script can be executed locally on firewall.

- Block the Virus Scanner service.
- Download the [Barracuda Cleanup Script for F10, F15, F100 models](#). Deploy it via [remote execution](#) to centrally managed firewalls. Alternatively run the commands manually in the [command line interface](#).

If you still do not have enough free disk space to update, contact [Barracuda Technical Support](#).

Upgrading One Firewall in a High Availability Cluster

If you are upgrading a firewall in a high availability (HA) cluster without upgrading its partner, you must re-synchronize the firewalls:

1. Go to **FIREWALL > Live > Show Proc.**
2. Select the **Sync Handler** process and select **Kill Selected**.
 The process is automatically restarted after a couple of seconds, and the primary and secondary firewalls automatically synchronize their sessions.

Barracuda CloudGen Admin

After updating a system, you must also download CloudGen Admin with the same version. CloudGen Admin is backward-compatible. That means you can manage 5.2.x, 5.4.x, 6.x and 7.x F-Series Firewalls and Control Centers with CloudGen Admin 7.2.1.

Always use the latest version of Barracuda CloudGen Admin.

Migration Instructions for 7.2.1 EA2

When upgrading according to the migration path above, you must complete the migration steps listed below:

First-Generation ATP to Second-Generation Barracuda ATP Cloud Migration

As of January 31, 2019, the first-generation ATP cloud services used by default with firmware versions 6.2.x, 7.0.x, 7.1.0, 7.1.1, and 7.2.0 will be discontinued. Firewalls using ATP must switch to the second-generation ATP cloud service, which is known as Barracuda Advanced Threat Protection (BATP).

The following table gives an overview of the options you have when you run a special firmware version:

Product	Your Firmware Version	Migrating Option
Stand-alone Box or Managed Box	6.x ... 7.0.x	Firmware 7.0.x is end-of-support in December 2018! Update to the latest 7.1.x or 7.2.x releases, which are using BATP, without the need for further changes. For more information, see How to Install Updates via CloudGen Admin on campus.barracuda.com .

Stand-alone Box	7.1.0, 7.1.1, 7.2.0	Update to the latest 7.1.x or 7.2.x releases, which are using B ATP, without the need for further changes. For more information, see How to Install Updates via CloudGen Admin on campus.barracuda.com . If you cannot update your standalone box(es) to the latest releases, you can also migrate manually. For more information, see How to Migrate Boxes with 7.1.0, 7.1.1 and 7.2.0 to B ATP below.
Control Center with Managed Box	CC: 7.1.0, 7.1.1, 7.2.0 and Box: 7.1.0, 7.1.1, 7.2.0	Update your managed boxes via the Control Center to the latest firmware release. For more information, see How to Update Control Center-Managed Standalone CloudGen Firewalls . If you cannot update your managed box(es) to the latest releases, you can also migrate manually. For more information, see How to Migrate Boxes with 7.1.0, 7.1.1 and 7.2.0 to B ATP below.
Control Center with Managed Box	CC: 7.1.2, 7.2.1 or newer and Box: 7.1.0, 7.1.1, 7.2.0	If you cannot update your managed box(es) to the latest release, contact the Barracuda Support Team.
Stand-alone Box Managed Box	7.1.2 or newer 7.2.1 or newer	These firmware versions already support B ATP. No changes are necessary.

How to Migrate Boxes with 7.1.0, 7.1.1, and 7.2.0 to B ATP


Step 1. Enable Expert Settings in Barracuda Firewall Admin

For more information, see [Barracuda Firewall Admin Settings](#).

Step 2. Enable the B ATP Cloud service

Enabling B ATP cloud service disconnects your firewall from the first-generation ATP service and connects it to the second-generation Barracuda ATP Cloud.

1. Log into your firewall.
2. Go to **CONFIGURATION > Configuration Tree > your virtual server > Assigned Services > AV (Virus Scanner) > Virus Scanner Settings**.
3. In the left menu, click **ATP**.
4. Click **Lock**.
5. In the **ATP Cloud Communication** section, select the check box **Enable B ATP Cloud**.

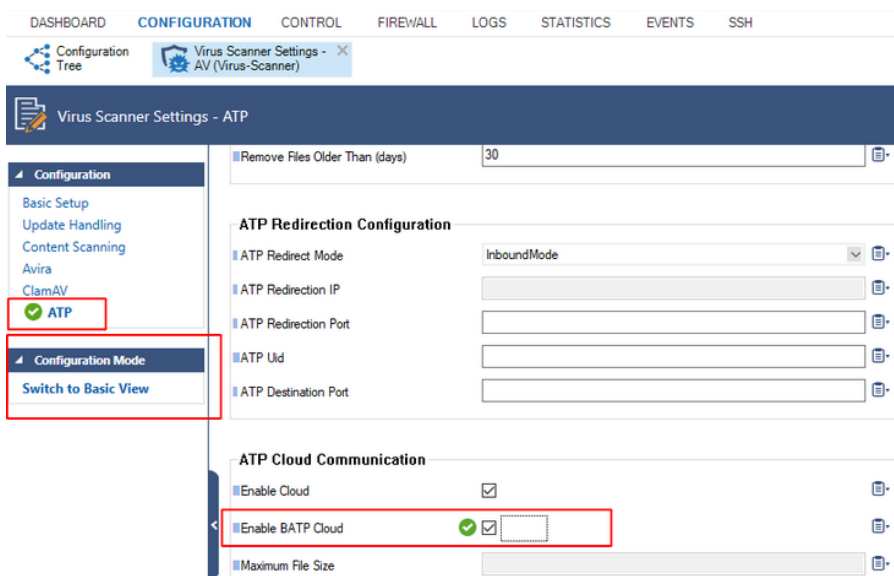

6. Click **Send Changes**.

7. Click **Activate**.

Your firewall now is connected to the second-generation Barracuda ATP Cloud service.

Firewall Activity Log

When updating a box to 7.2.1 EA2, logging of the actions Drop/Remove is disabled by default.

In case the log policy **Activity Log Data** is set to **Log-Info-Text**, the setting needs to be re-configured after the update to 7.2.1. The update will introduce the default value **Log-Info-Code**.

Transfer and Reassign Certificates

In case you are running a standalone firewall and want to manage it in a Control Center, all certificates stored in the local Certificate Store must be saved on the standalone firewall, imported to the Certificate Store on the Control Center and reassigned at their appropriate location of usage. For more information, see [How to Import an Existing CloudGen Firewall into a Control Center](#).


SSL VPN, NAC, and SSL VPN Authentication

SSL VPN authentication and NAC are automatically migrated into the default access control policy.

For more information see [How to Configure Access Control Policies for Multi-Factor and Multi-Policy Authentication](#).

ECDSA SSH Key

Depending on the cipher preferred by the SSH client, you may be prompted to accept the new ECDSA key.

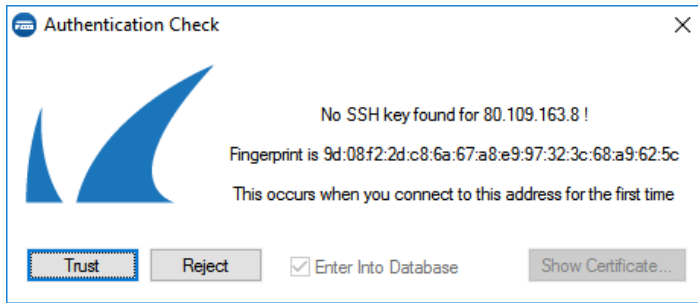

Rename SSL Interception

SSL Interception has been renamed to SSL Inspection.

Initial Grace Period for Default Password

When licensing a hardware appliance or a virtual firewall, the initial default password must immediately be changed to a new password after logging in. The new password will be valid even after the license has expired.

Start the Update

You can now update the CloudGen Firewall or Control Center.

For more information, see [Updating CloudGen Firewalls and Control Centers](#).

Figures

1. flash_free_disk_space.png
2. migrate_to_batp_enable_batp_cloud.png
3. authentication_check.png

© Barracuda Networks Inc., 2022 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.