

## How to Determine the Current Installation Configuration Settings - ArchiveOne Enterprise Compliance

<https://campus.barracuda.com/doc/45712419/>

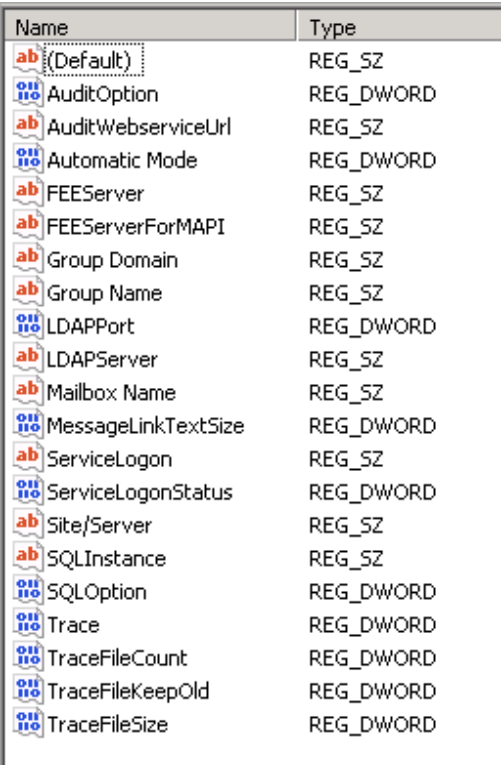
This article refers to Barracuda ArchiveOne Enterprise versions 5.8 through 6.5.3.

Use the steps in this article to determine, and note, the existing system configuration when performing a Barracuda ArchiveOne installation, reinstallation, upgrade, or migration.

The steps in this article involve editing the Windows machine registry. Using the Registry Editor incorrectly can cause serious, system-wide problems that may require you to re-install Windows to correct. Barracuda Networks cannot guarantee that any problems resulting from the use of Registry Editor can be solved. Use this tool at your own risk. It is *highly recommended* that you create a backup of the registry before making any changes.

Collect the details listed in the following table:

Configuration Setting	Details
Microsoft Exchange Server Name	Name of the Exchange Server or CAS Array to which ArchiveOne is connected. 1. Open the ArchiveOne Admin console. 2. Select the <a href="#">Status Node</a> . The Exchange Server name displays in the right pane.
Configuration Server Name	Name of the server that hosts the Add-ins shared folder which contains the configuration data. 1. Open the ArchiveOne Admin console. 2. Select the <b>Status</b> node. The Configuration Server name displays in the right pane.
SQL Instance Name	Name of the SQL instance used by ArchiveOne to provide the <a href="#">Browse Archive</a> , <a href="#">Auditing</a> , <a href="#">Search Optimization</a> , and <a href="#">Case Management</a> features. This can be found by examining the archive server registry: 1. On the archive server, type regedit to open the Registry Editor. 2. Browse to: <b>HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\AOneCmplService\Parameters</b> 3. The <b>SQLInstance</b> value is the SQL instance name.
Service Account Name	Name of the domain account used by ArchiveOne to function. 1. On the archive server, type regedit to open the Registry Editor. 2. Browse to: <b>HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\AOneCmplService\Parameters</b> 3. The <b>Mailbox Name</b> value is the service account name.

<b>User Group Name</b>	<p>Name of the user group for users allowed to administrate ArchiveOne.</p> <ol style="list-style-type: none"> <li>1. On the archive server, type regedit to open the Registry Editor.</li> <li>2. Browse to: <b>HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\AOneCmplService\Parameters</b></li> <li>3. The <b>Group Name</b> value is the service account name.</li> </ol>																																												
<b>Custom Registry Keys</b>	<p>Customized registry settings.</p> <ol style="list-style-type: none"> <li>1. On the archive server, type regedit to open the Registry Editor.</li> <li>2. Browse to: <b>HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\AOneCmplService\Parameters</b></li> </ol> <p>Determine if you have any custom registry keys. The following image displays the standard registry keys; if you have additional registry keys, note their name, type, and value:</p>  <table border="1"> <thead> <tr> <th>Name</th> <th>Type</th> </tr> </thead> <tbody> <tr><td>(Default)</td><td>REG_SZ</td></tr> <tr><td>AuditOption</td><td>REG_DWORD</td></tr> <tr><td>AuditWebserviceUrl</td><td>REG_SZ</td></tr> <tr><td>Automatic Mode</td><td>REG_DWORD</td></tr> <tr><td>FEEServer</td><td>REG_SZ</td></tr> <tr><td>FEEServerForMAPI</td><td>REG_SZ</td></tr> <tr><td>Group Domain</td><td>REG_SZ</td></tr> <tr><td>Group Name</td><td>REG_SZ</td></tr> <tr><td>LDAPPort</td><td>REG_DWORD</td></tr> <tr><td>LDAPServer</td><td>REG_SZ</td></tr> <tr><td>Mailbox Name</td><td>REG_SZ</td></tr> <tr><td>MessageLinkTextSize</td><td>REG_DWORD</td></tr> <tr><td>ServiceLogon</td><td>REG_SZ</td></tr> <tr><td>ServiceLogonStatus</td><td>REG_DWORD</td></tr> <tr><td>Site/Server</td><td>REG_SZ</td></tr> <tr><td>SQLInstance</td><td>REG_SZ</td></tr> <tr><td>SQLOption</td><td>REG_DWORD</td></tr> <tr><td>Trace</td><td>REG_DWORD</td></tr> <tr><td>TraceFileCount</td><td>REG_DWORD</td></tr> <tr><td>TraceFileKeepOld</td><td>REG_DWORD</td></tr> <tr><td>TraceFileSize</td><td>REG_DWORD</td></tr> </tbody> </table>	Name	Type	(Default)	REG_SZ	AuditOption	REG_DWORD	AuditWebserviceUrl	REG_SZ	Automatic Mode	REG_DWORD	FEEServer	REG_SZ	FEEServerForMAPI	REG_SZ	Group Domain	REG_SZ	Group Name	REG_SZ	LDAPPort	REG_DWORD	LDAPServer	REG_SZ	Mailbox Name	REG_SZ	MessageLinkTextSize	REG_DWORD	ServiceLogon	REG_SZ	ServiceLogonStatus	REG_DWORD	Site/Server	REG_SZ	SQLInstance	REG_SZ	SQLOption	REG_DWORD	Trace	REG_DWORD	TraceFileCount	REG_DWORD	TraceFileKeepOld	REG_DWORD	TraceFileSize	REG_DWORD
Name	Type																																												
(Default)	REG_SZ																																												
AuditOption	REG_DWORD																																												
AuditWebserviceUrl	REG_SZ																																												
Automatic Mode	REG_DWORD																																												
FEEServer	REG_SZ																																												
FEEServerForMAPI	REG_SZ																																												
Group Domain	REG_SZ																																												
Group Name	REG_SZ																																												
LDAPPort	REG_DWORD																																												
LDAPServer	REG_SZ																																												
Mailbox Name	REG_SZ																																												
MessageLinkTextSize	REG_DWORD																																												
ServiceLogon	REG_SZ																																												
ServiceLogonStatus	REG_DWORD																																												
Site/Server	REG_SZ																																												
SQLInstance	REG_SZ																																												
SQLOption	REG_DWORD																																												
Trace	REG_DWORD																																												
TraceFileCount	REG_DWORD																																												
TraceFileKeepOld	REG_DWORD																																												
TraceFileSize	REG_DWORD																																												

## Figures

1. registry\_keys\_compliance.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.