

Example - Create a Built-In User Database

<https://campus.barracuda.com/doc/42044717/>

If you do not have an external authentication server you can manage users in the built-in database on the Barracuda SSL VPN. Each user database can contain multiple groups. You can also create multiple local user databases if you are using Barracuda SSL VPN 480 or higher.


Before you begin

Create a list of all users you want to include in the local database. Consider individual access rights when designing the user groups. Create a local user database or add your users to the pre-configured built-in database on the **User Databases** page.

Step 1. Create a built-In database

1. Go to the **ACCESS CONTROL > User Databases** page.
2. In the **Create User Database** section, click the **Built-In** tab.
3. Enter a descriptive **Name** for the user database.
4. (Optional) Click **Show Advanced Settings** to change the case sensitivity option. Per default usernames are case sensitively.
5. Click **Add**.

The user database is now displayed in the **User Databases** section on the bottom of the page.

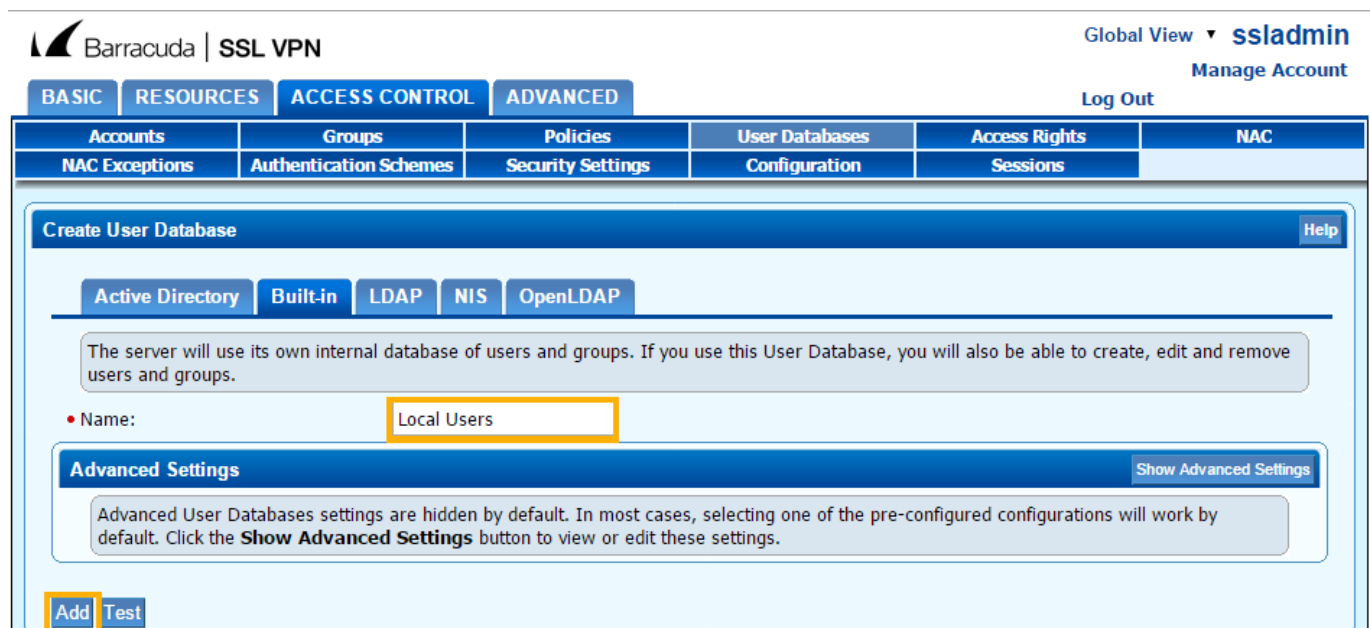


The screenshot shows the Barracuda SSL VPN administration interface. At the top, there's a navigation bar with 'BASIC', 'RESOURCES', 'ACCESS CONTROL', and 'ADVANCED' tabs. Below this is a sub-navigation bar with 'Accounts', 'Groups', 'Policies', 'User Databases', 'Access Rights', and 'NAC'. The 'User Databases' tab is selected. The main content area is titled 'Create User Database' and has a 'Help' button. It features five tabs: 'Active Directory', 'Built-in', 'LDAP', 'NIS', and 'OpenLDAP'. The 'Built-in' tab is active. A text box explains that the server will use its own internal database. Below this, there's a 'Name:' label and a text input field containing 'Local Users'. There's also a 'Show Advanced Settings' button. At the bottom, there are 'Add' and 'Test' buttons.

Step 2. Create a user group

Users in a built-in database can be part of one or several user groups. There is no limit on how many groups a user can be assigned to.

1. Go to the **ACCESS CONTROL > Groups** page.
2. In the **Create Group** section, select the built-in user database you created in step 1.
3. Enter a descriptive **Name** for the group.
4. Click **Add**.

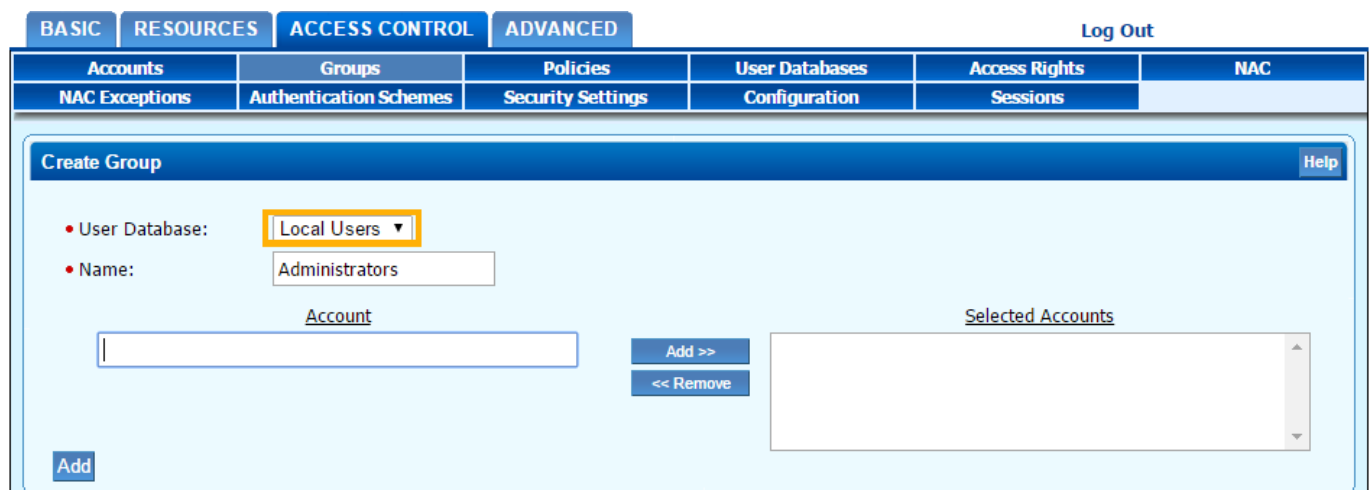

Step 3. Add users to the built-in user database


Create user accounts in the built-in user database and place them in groups.

1. Go to the **ACCESS CONTROL > Accounts** page.
2. In the **Create Account** section, select the local database from the **User Database** list.
3. Enter the following information:
 - **Username** – The login name of the user.
 - **Password** – The user password.
 - You must also confirm it in the **Confirm Password** field.
 - Select the checkbox if you want to force the user to change their password at the next login.
 - **Full Name** – The full name of the user.
 - **Service Account Password** – The password for the user.
4. (Optional) Enter the email of the user in the **Email** field.
5. Add your user account to the user group you created in step 2.:
 1. Type the first letters of the group name in the **Available Groups** field. Select the group

from the dynamic list.

2. Click **Add** to add the account to the **Selected Accounts** table.

6. Click **Add**.

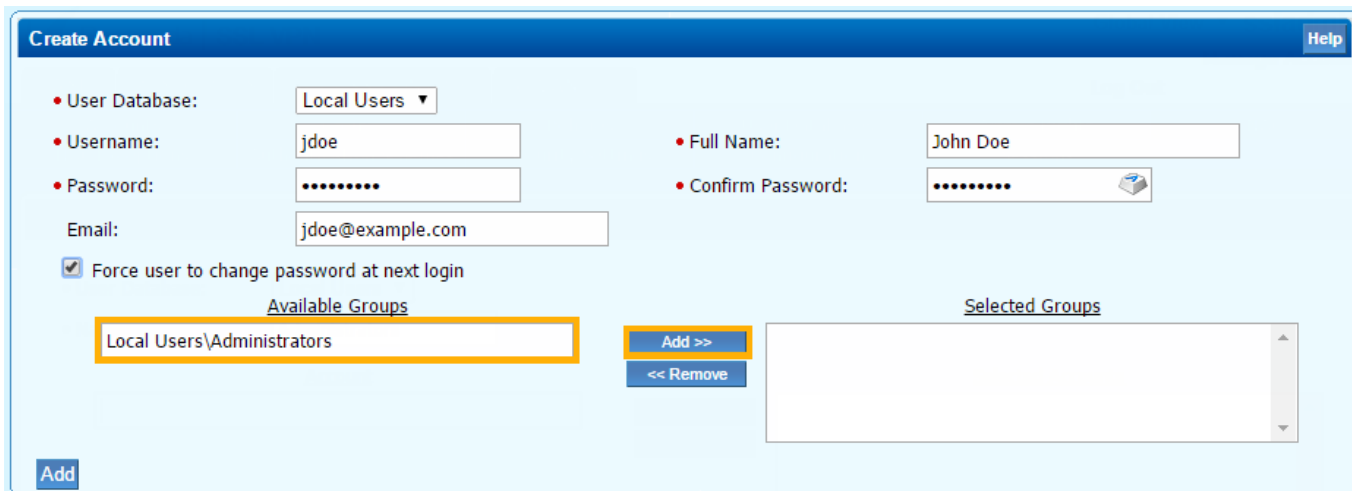

Create Account Help

- User Database: Local Users ▼
- Username: jdoe
- Password: ••••••••
- Full Name: John Doe
- Confirm Password: ••••••••
- Email: jdoe@example.com
- ☒ Force user to change password at next login

Available Groups
Local Users\Administrators

Selected Groups

Add >> << Remove

Add

The user account is now part of the group in the built-in database you created. All entries can be edited at any time, to add or change attributes.

Figures

1. local1.png
2. local2.png
3. local3.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.