

User Objects

<https://campus.barracuda.com/doc/46895702/>

The **Users** view allows you to view and configure user objects. User objects restrict access rules to specific users and user groups. When creating a user object, you can include (reference to) other user objects that are already configured. A user object is also automatically created whenever a connection attempt is processed by the firewall. The object is then inserted into the corresponding rule.


Create a User Object

1. Select **New** in the bottom bar or from the context menu in the **User Objects** window.
2. Specify a **Name** for the user object.
3. Optionally, insert a **Description**.
4. In the **User/Group** list, select your users / groups and click **New** to add them to the **User** list. In this list, the Microsoft Windows domain users and groups known to the Barracuda Personal Firewall are available for selection. If the Windows workstation is a member of a Windows domain, the domain user and group information can be retrieved from the Active Directory server by clicking **Update**.

Irrespective of the operating system's active language on the workstation, the following users will always be displayed in English:

- NT AUTHORITY\SYSTEM
- NT AUTHORITY\LOCAL SERVICE
- NT AUTHORITY\NETWORK SERVICE
- NT AUTHORITY\NETWORK

The internal firewall engine will transform these names to the appropriate language version. Do not insert them manually in a different language.

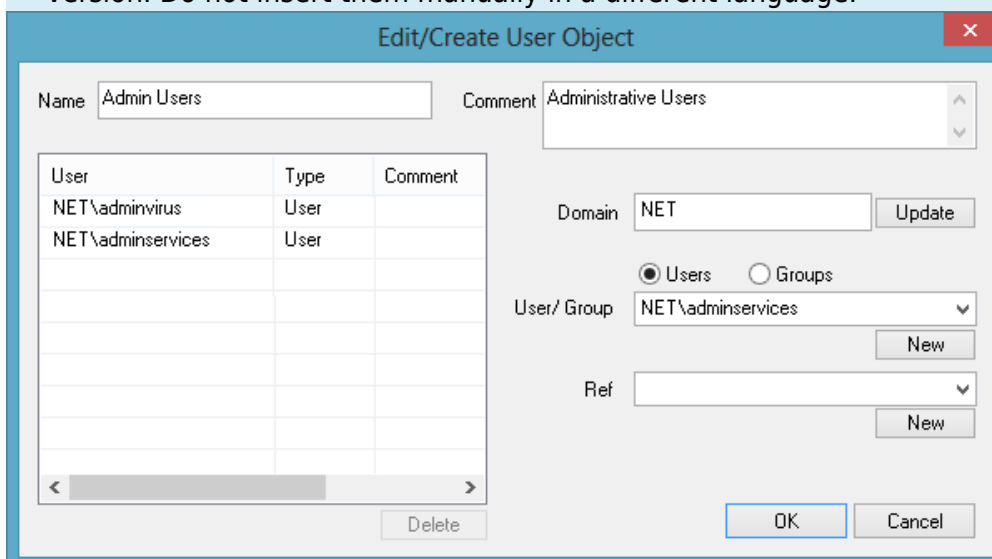

User	Type	Comment
NET\adminvirus	User	
NET\admins-services	User	

If applicable, specify a reference to the user object. Click **New** after each selection.

5. Click **OK**.

To save configuration changes made on the Barracuda CloudGen Firewall, click **Send Changes** and **Activate**. To save configuration changes made on the Barracuda Personal Firewall, use the option provided on the page, or click the **Alt** key, expand the **Firewall** menu, and select **Save Configuration**.

Figures

1. user_obj.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.