

Wi-Fi AP Authentication Aerohive Configuration

<https://campus.barracuda.com/doc/48203202/>

To authenticate users connected to Aerohive access points, you must stream the syslog containing the authentication data to the Barracuda NextGen Firewall F-Series.

Reference devices/versions:

- Aerohive AP230 802.11ac Wireless AP Version 6.4r1a
- Aerohive Networks HiveManager Online 6.4r1

Enable syslog streaming on the Aerohive AP

1. Log into the Aerohive Networks HiveManager.
2. Go to **Configuration > Advanced Configuration > Management Services > Syslog Assignments**.



Home Dashboard Monitor Reports Maps **Configuration** Tools

Configuration << Syslog Assignments

Guided Configuration

New Clone Paintbrush Remove

<input type="checkbox"/>	Name	Facility	Host	Description

Devices

- Hives
- Network Policies
- SSIDs
- Port Types
- User Profiles
- Networks
- VPN Services
- Auto Provisioning
- Radio Profiles

Advanced Configuration

- Common Objects
- Security Policies
- QoS Policies

Management Services

- DNS Assignments
- IP Tracking
- Location Servers
- Management Options
- NTP Assignments
- SNMP Assignments
- Syslog Assignments**

Authentication

Keys and Certificates

- Click **New** and configure syslog streaming:
 - Syslog Server** - Select the IP address of the Barracuda NextGen Firewall F-Series from the dropdown.
 - Severity** - Select **Info** from the dropdown.
- Click **Apply**.
- Click **Save**.

Syslog Assignments > New

Save Cancel

Name* NGFirewall-QA (1-32 characters)

Facility Local6

Description (0-64 characters)


Syslog servers are on the same internal network as the reporting Aerohive devices (for PCI DSS compliance)

Apply Remove Cancel

<input type="checkbox"/>	Syslog Server	Severity	Description
<input type="checkbox"/>	192.168.0.1	Info	Barracuda NG Firewall (0-64 characters)

Add syslog configuration to network policy

Add the syslog configuration to the **Network Policy** you are using for your access points.

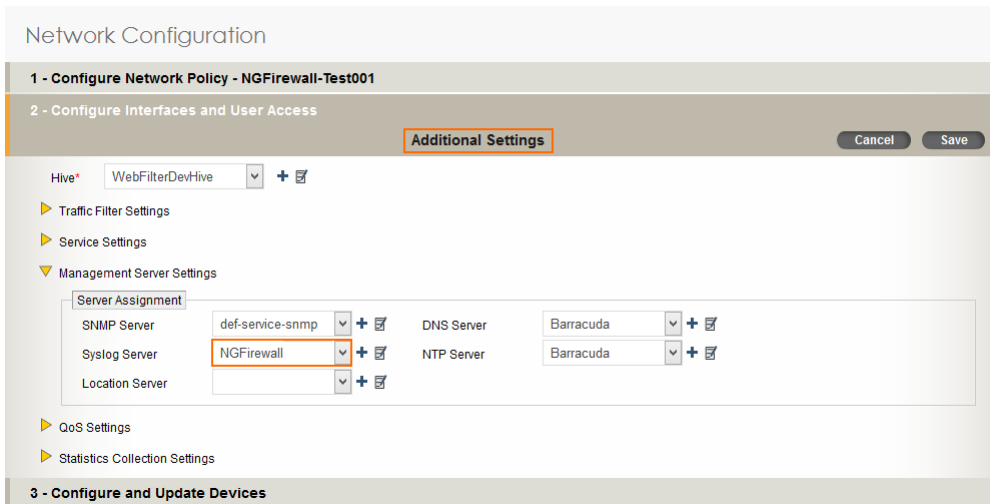

Verify that the Barracuda NextGen Firewall F-Series is receiving the syslog data

On the Barracuda NextGen Firewall F-Series, go to **LOGS** and open the **Box > Control > AuthService_wifiap.log**. After a successful authentication, you will see a logged in user <username> with IP <IP address> line in the log. The Wi-Fi access point name is also listed.

Box\Control\AuthService_wifiap <new Log>

Select Log File

Time	Type	TZ	Message
2015 04 08 16:41:51	Info	+02:00	[config] reloading configuration
2015 04 08 16:41:51	Info	+02:00	[config] setting maximum login time to 0 hours
2015 04 08 16:41:51	Info	+02:00	[config] setting UDP listen port to 514
2015 04 08 16:41:51	Info	+02:00	[config] setting TCP listen port to 514
2015 04 08 16:41:51	Info	+02:00	[config] setting SSL listen port to 6514
2015 04 08 16:41:51	Info	+02:00	[config] model: aerohive
2015 04 08 16:41:51	Info	+02:00	[config] source-ip: 10.17.76.10
2015 04 08 16:41:51	Info	+02:00	[config] protocol: udp
2015 04 08 16:43:25	Info	+02:00	[auth] udp:10.17.76.10 (type aerohive): logged in user user1 with IP 192.168.200.215

Figures

1. aerohive01.png
2. aerohive02.png
3. aerohive03.png
4. wifi_log_message_aerohive.png

© Barracuda Networks Inc., 2019 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.