

How to Activate and License a Stand-alone Hardware NextGen F-Series or Control Center Appliance

<https://campus.barracuda.com/doc/48203277/>

To automatically download and install the license on your NextGen Firewall F, connect to the firewall with NextGen Admin. NextGen Admin transmits the serial number of your unit to the Barracuda Licensing service and initiates the activation process. After completing the customer information form and accepting the EULA, your license is activated and automatically downloaded and installed on your unit.

Before you begin

- NextGen Admin must be able to connect to the Barracuda Licensing Servers.
- (optional) NextGen Admin automatically uses the proxy address in the Windows registry. If a proxy is entered but disabled, NextGen Admin still uses it. You can enter a proxy in NextGen Admin by navigating to **OPTIONS > Settings > Barracuda Activation > Proxy Settings**.


Automatically download and activate your licenses

1. Log into the Barracuda NextGen Firewall F-Series using NextGen Admin.


Default User: root

Default Password: ngf1r3wall

2. (optional) Complete the Getting Started Wizard. For more information, see [Getting Started](#).
3. The activation process is initiated automatically after 30 seconds. You can also start the process manually by clicking on the blue arrow in the **Licensing** element on the **DASHBOARD**. After downloading the licenses, the activation form opens.

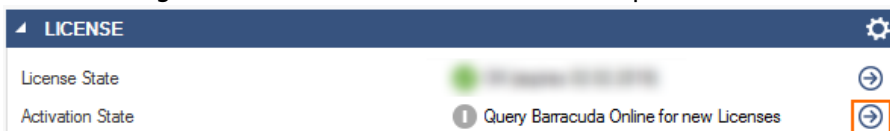

4. (**evaluation license only**) Click the **Evaluation License** check box.
5. Enter the **Customer** and **Purchase Information**.
6. Read/scroll through the terms and conditions and click the **I accept the Terms and Conditions** check box.

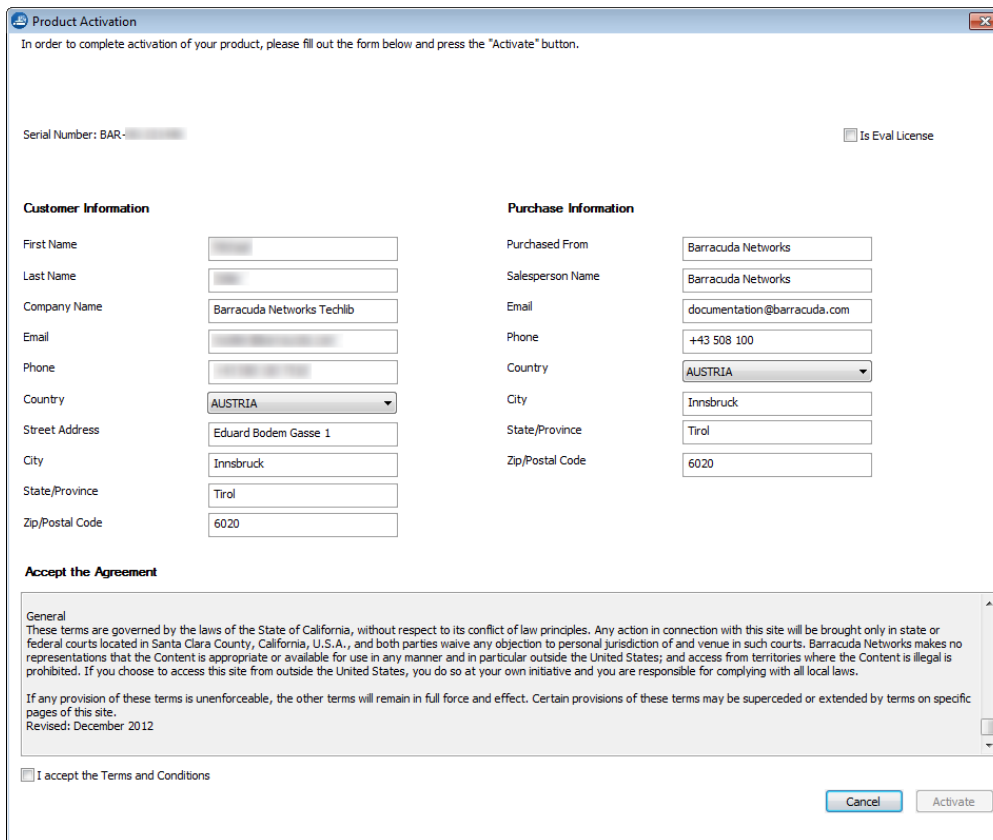

Product Activation
In order to complete activation of your product, please fill out the form below and press the "Activate" button.

Serial Number: BAR- [redacted] Is Eval License

Customer Information		Purchase Information	
First Name	<input type="text"/>	Purchased From	<input type="text" value="Barracuda Networks"/>
Last Name	<input type="text"/>	Salesperson Name	<input type="text" value="Barracuda Networks"/>
Company Name	<input type="text" value="Barracuda Networks Techlib"/>	Email	<input type="text" value="documentation@barracuda.com"/>
Email	<input type="text"/>	Phone	<input type="text" value="+43 508 100"/>
Phone	<input type="text"/>	Country	<input type="text" value="AUSTRIA"/>
Country	<input type="text" value="AUSTRIA"/>	City	<input type="text" value="Innsbruck"/>
Street Address	<input type="text" value="Eduard Bodem Gasse 1"/>	State/Province	<input type="text" value="Tirol"/>
City	<input type="text" value="Innsbruck"/>	Zip/Postal Code	<input type="text" value="6020"/>
State/Province	<input type="text" value="Tirol"/>		
Zip/Postal Code	<input type="text" value="6020"/>		

Accept the Agreement

General
These terms are governed by the laws of the State of California, without respect to its conflict of law principles. Any action in connection with this site will be brought only in state or federal courts located in Santa Clara County, California, U.S.A., and both parties waive any objection to personal jurisdiction of and venue in such courts. Barracuda Networks makes no representations that the Content is appropriate or available for use in any manner and in particular outside the United States; and access from territories where the Content is illegal is prohibited. If you choose to access this site from outside the United States, you do so at your own initiative and you are responsible for complying with all local laws.

If any provision of these terms is unenforceable, the other terms will remain in full force and effect. Certain provisions of these terms may be superceded or extended by terms on specific pages of this site.
Revised: December 2012

I accept the Terms and Conditions

- Click **Activate**. The activation process may take a couple of minutes.
 - After the activation process, you will receive a notification email from Barracuda Networks Customer Services.
 - If you are using a high availability setup, your secondary Barracuda NextGen Firewall F waits for the license to be activated and then receives the license from the primary unit.

Uptime:	4 Days and 23:08:12	Firmware Version:	GWAY-5.4.3-182
System Time:	Mon Jun 2 11:11:58 2014	Appliance Model:	
Box:	10.0.91.70 - doc	Serial Number:	010101
License State:	Normal box operation	Number of CPUs:	4
Activation State:	Current	Architecture:	64 bit
		Admin Sessions:	6

Your Barracuda appliance is now licensed and activated. Check **Control > Licenses** to see which licenses are installed on your unit.

Normal box operation

ACTIVE LICENSES

Name/Module	License	Expires	HostID	Status
base-brf101	00000273-BN-F101-1410	01.01.2030 00:00:00	MAC-00:90:0b:15:3fa2	Valid-Host-ID
add-brf101-e	00000273-BN-F101-EnergizeUpdate-1411	01.01.2030 00:00:00	MAC-00:90:0b:15:3fa2	Valid-Host-ID

License Values

License: Barracuda
 License-Model: F101
 Demo Mode: no
 Export Mode: no
 CC managed: yes
 Platform:
 Product: f101
 Configured Appliance: F101
 Detected Appliance: F101
 Serial Number: Z21446
 Flash based: yes box config
 Statistics: no flash
 Licensed Tunnels: unlimited
 Compression: licensed
 Hardware Encryption: not-licensed
 Padlock Encryption: licensed
 VPN Shaping: licensed
 NAC: not-licensed
 Protected IPs: unlimited

Figures

1. license_activate_element.png
2. activation_form.png
3. license_hw01.png
4. F101_license.png

© Barracuda Networks Inc., 2019 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.