



Reprovision Other Virtual Machines (VMs)

The other Barracuda Web Application Firewall virtual machines deployed can be reprovisioned using the Consconf.


Pre-requisites

The Barracuda Web Application Firewall virtual machine:


- Should have internet access to reach the Barracuda servers on port 80 and 443.
- Should not be clustered with other Barracuda Web Application Firewall virtual machine(s).


To reprovision a regular virtual machine, follow the steps mentioned below:

1. In your hypervisor client, ensure the virtual appliance is “Up” and running.
2. From the console, log in as **admin** with the password **admin**.

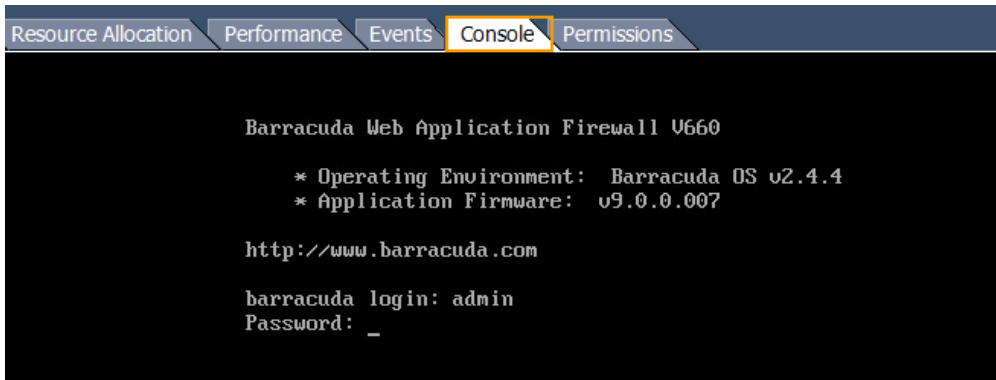

3. In the **System Configuration** window, use the down arrow key and select **Licensing**. Clear the existing license token, enter the new license **Token** and hit **Save**.

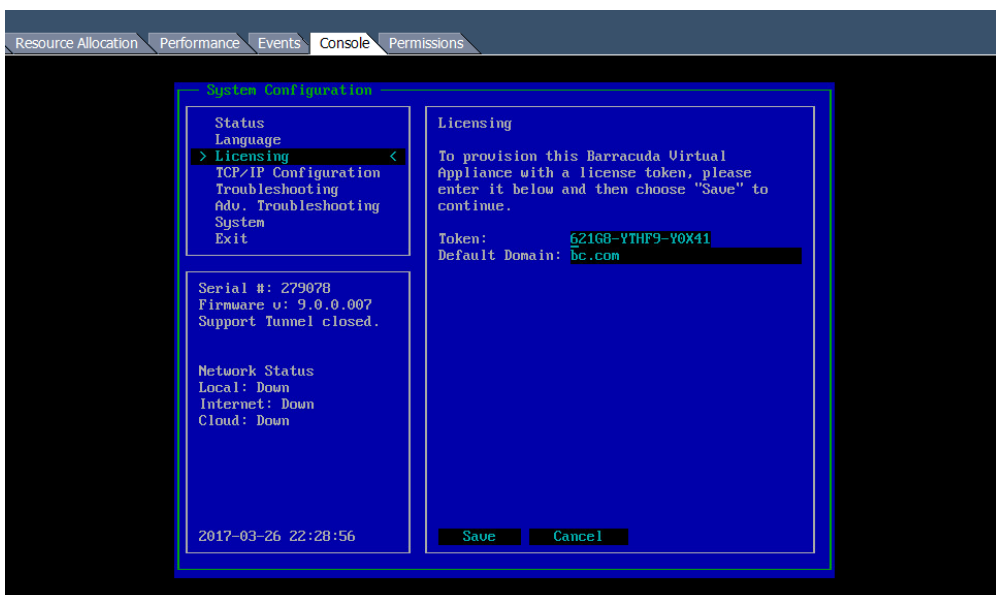

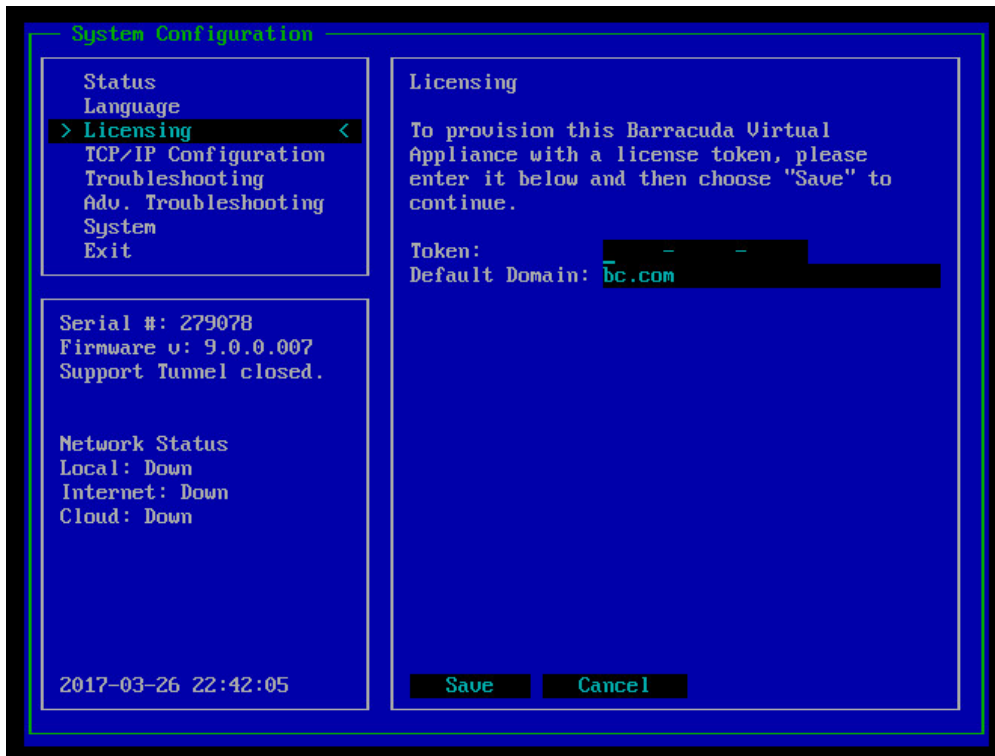

4. To provision your virtual machine with the new license token, type **YES** and press **Enter**.



```

Provisioning...

Fetched the following:

    status  OK
    Current Model  U660
    Current Serial 279078
    New      Model  U660
    New      Serial 907935

Type "YES" (in capitals) and press Enter to apply this license.
(anything else and Enter to cancel.)
YES
Processing...

```

5. After the license is installed, press **Enter** to reboot the virtual machine.

```

Provisioning...

Fetched the following:

    status  OK
    Current Model  U660
    Current Serial 279078
    New      Model  U660
    New      Serial 907935

Type "YES" (in capitals) and press Enter to apply this license.
(anything else and Enter to cancel.)
YES
Processing...
    status  License installed. Press <Enter> to reboot...

-

```

6. The system completes the reboot process and displays the login screen.
7. Login as **admin** with the password **admin**.

```

Barracuda Web Application Firewall U660

* Operating Environment: Barracuda OS v2.4.4
* Application Firmware:  v9.0.0.007

http://www.barracuda.com

barracuda login: admin
Password: _

```

8. In the **System Configuration** section, use the down arrow key and select **Licensing**. The license **Token** displays the new token used in step 3.



System Configuration

- Status
- Language
- > **Licensing** <
- TCP/IP Configuration
- Troubleshooting
- Adv. Troubleshooting
- System
- Exit

Serial #: 907935
Firmware v: 9.0.0.007
Support Tunnel closed.

Network Status
Local: Down
Internet: Down
Cloud: Down

2017-03-26 22:57:40

Licensing

To provision this Barracuda Virtual Appliance with a license token, please enter it below and then choose "Save" to continue.

Token: F23NG-UH45M-C5FWY
Default Domain: bc.com

Save **Cancel**

