

## How to Use Tags to Organize Connected Appliances


<https://campus.barracuda.com/doc/69960199/>

Use tags to group different types of connected Barracuda appliances into logical groups. For example, if you want to group all of the Barracuda Web Security Gateways in your Paris office by location, you might call your group *ParisWSG*. If you want to group multiple types of Barracuda Networks products that serve the Marketing department, you could name the group *MarketingVarious*, indicating that there is more than one type of product in the group.


Note that some features must be configured on each individual device within a group. Examples include IP Address; Quarantine settings on the Barracuda Email Security Gateway; Services on the Barracuda Web Application Firewall; and Default Host Name on various product types. Note that some tabs or pages of the web interface for a product may be dimmed (unavailable) for this reason, or because the features on that tab or page are not supported for multiple products simultaneously.

### Managing Tags

Click **Manage Tags** at the bottom of the [Appliance Control Tree](#) to open the **Tag Management** window.

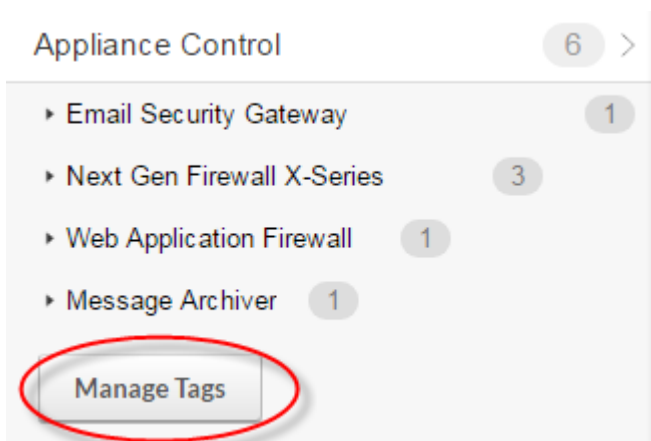


Within the **Tag Management** window, you can choose to display by **Appliances**, and see their associated tags, or display by **Tags**, and see their associated appliances.




**To create a new tag:**


1. At the top of the **Tag Management** window, click **Tags**.  
All of the tags you have already created are shown in a list.
2. Click **Create Tag**.
3. Type a name for the new tag, then click **Create**.  
The new tag appears in the list above.


**To assign appliances to tags:****When Displaying by Tags: Adding Appliances to Tags**

1. At the top of the **Tag Management** window, click **Tags**.  
All of the tags you have already created are shown in a list.
2. Click the plus sign  next to the tag to which you want to assign the appliance.
3. Select an appliance from the list, then click **Add Appliance**.
4. Add additional appliances to the group, if needed.


If you decide not to assign the appliance, click the plus sign, which is now blue , again to cancel the action.

**When Displaying by Appliances: Adding Tags to Appliances**

1. At the top of the **Tag Management** window, click **Appliances**.  
All of the connected appliances are shown in a list.
2. Click the plus sign  next to the appliance to which you want to assign a tag.
3. Select a tag from the menu, then click **Add Tag**.  
Optionally, select **Create New Tag** at the top of the selection menu, enter the name of the new tag, then click **Add Tag**.
4. Add additional tags to the group, if needed.


If you decide not to assign the tag, click the plus sign, which is now blue , again to cancel the action.

**To remove an appliance from the tag group.**

1. At the top of the **Tag Management** window, click **Tags**.
2. Click the **x** icon  associated with the appliance name within the tag.

**Note:** Removing an appliance from a tag group does *not* [disconnect](#) the devices from Barracuda Cloud Control, it just removes the tag grouping.

**To delete a tag:**

1. At the top of the **Tag Management** window, click **Tags**.
2. Click the delete icon  next to the tag you want to delete.
3. Confirm that you want to delete the tag.

**Note:** Deleting a tag group does *not* [disconnect](#) the devices from Barracuda Cloud Control, it just removes the tag grouping.

**To search for a tag:**

1. In the search field at the top of the **Tag Management** window, type some or all of the tag name and press **Enter**.
2. Matching tag names are displayed in a list below.
3. If no matches are found, you can create a new tag here.  
Enter the name of the new tag and click **Create**.

## Figures

1. manageTags.png
2. displayByOptions.png
3. plusIcon.png
4. plusIconBlue.png
5. plusIcon.png
6. plusIconBlue.png
7. xlIcon.png
8. deleteIcon.png

© Barracuda Networks Inc., 2020 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.