


Hardware Models

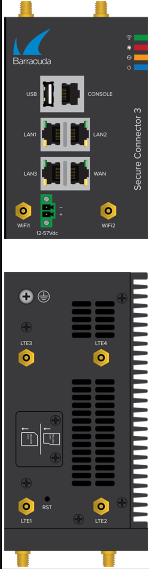
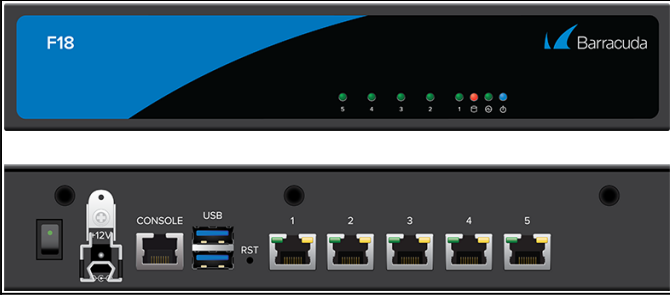
<https://campus.barracuda.com/doc/71862265/>

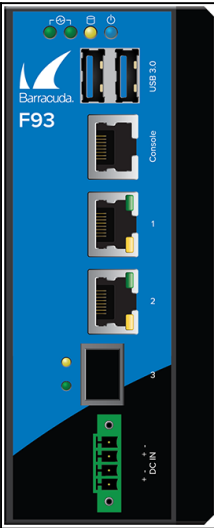
The Barracuda CloudGen Firewall F-Series is available in multiple hardware models that meet different networking requirements for small or home offices to large data centers.

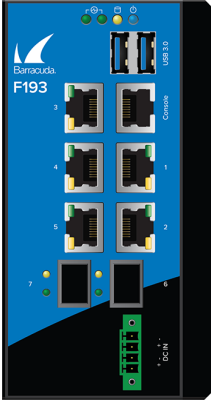
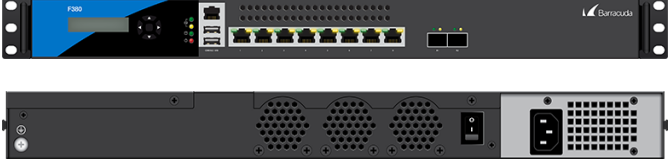
When a hardware model is updated, it is released as a new revision. For example, the second version of the F800 is released as the F800 Revision B. When a new revision is launched, the preceding revision is phased out. The sticker on the back of your appliance includes information on the model revision. E.g: **Rev.C** BAR-NG-1234567.

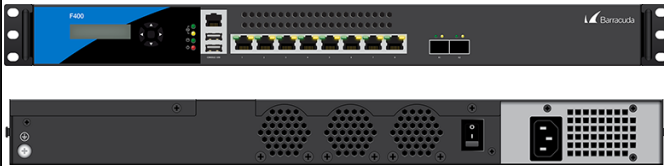
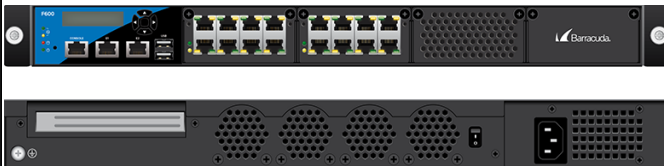
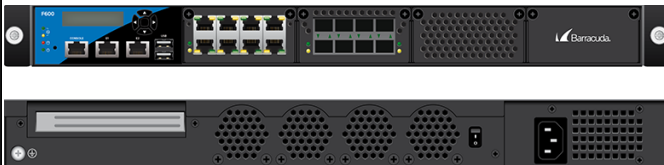
Hardware Appliances

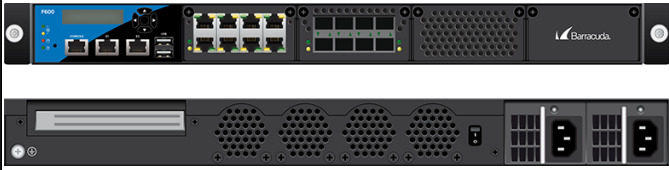
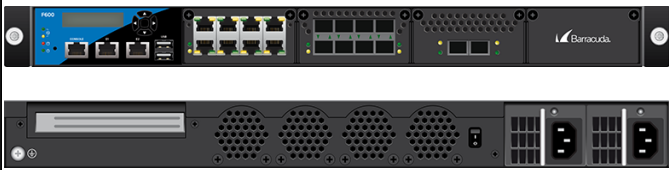
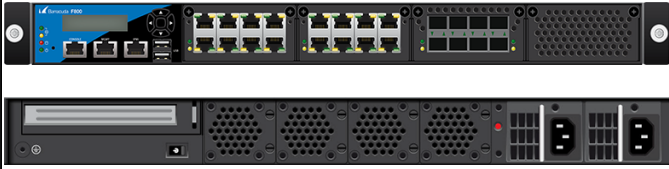
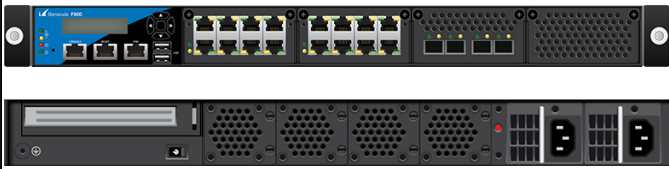
Model	Housing	Port Density	Form Factor	Required Firmware
SC2 Revision A	 	• 3x 1GbE (LAN) • 1x 1GbE PoE recipient (WAN) • Wi-Fi (optional) • 3G/UMTS or 4G /LTE (optional)	Compact	SC 2.0.0 or higher

SC3 Revision A		• 3x 1GbE (LAN) • 1x 1GbE PoE recipient (WAN) • Wi-Fi (optional) • 3G/UMTS or 4G /LTE (optional)	Compact	SC 3.0.0 or higher
F12 Revision A		• 5x 10/100/1000 MBit RJ45 Ethernet ports	Compact	• 8.0.1 or higher
F18 Revision B		• 5x 10/100/1000 MBit RJ45 Ethernet ports	Compact	• 8.0.1 or higher
F80 Revision B		• 5x 10/100/1000 MBit RJ45 Ethernet ports • Integrated Wi-Fi (IEEE 802.11b/g/n)	Compact	• 8.0.1 or higher

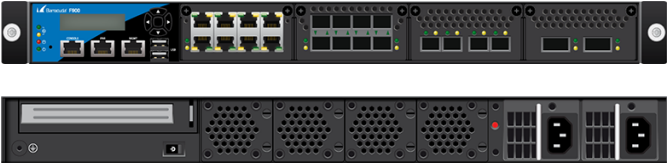
F82 DSL Revision A		F82 Annex-A • 4x 10/100/1000 MBit RJ45 Ethernet ports • RJ 11 (Annex A) • 1 GbE Optical Fiber SFP • Integrated Wi-Fi (IEEE 802.11b/g/n) F82 Annex-B • 4x 10/100/1000 MBit RJ45 Ethernet ports • RJ45 (Annex B/J) • 1 GbE Optical Fiber SFP • Integrated Wi-Fi (IEEE 802.11b/g/n)	Compact	• 8.0.1 or higher
F93 Revision a.R		• 2x 1 GbE RJ45 Ethernet ports • 1x 1 GbE Optical Fiber SFP	Compact	• 8.0.3 or higher • 8.2.0 or higher

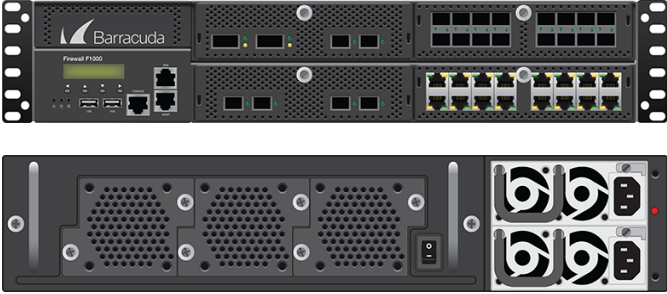
F180 Revision B		• 12x 10/100/1000 MBit RJ45 Ethernet ports • 4x 1 GbE Optical Fiber SFP • Integrated Wi-Fi (IEEE 802.11b/g/n)	Compact	• 8.0.4 + Hotfix 1039 or higher
F193 Revision a.R		• 5x 1 GbE RJ45 Ethernet ports • 2x 1 GbE Optical Fiber SFP	Compact	• 8.0.3 or higher • 8.2.0 or higher
F280 Revision C		• 12x 10/100/1000 MBit RJ45 Ethernet ports • 4x 1 GbE Optical Fiber SFP • Integrated Wi-Fi (IEEE 802.11b/g/n)	Desktop	• 8.0.4 + Hotfix 1039 or higher
F380 Revision B		• 8x 10/100/1000 MBit RJ45 Ethernet ports • 2x 10 GbE Optical Fiber SFP+	1U Rackmount	• 8.0.4 + Hotfix 1039 or higher

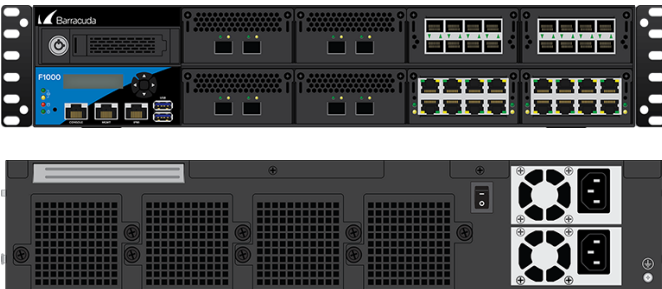
F400 Revision C		• 8x 10/100/1000 MBit RJ45 Ethernet ports • 2x 10 GbE Optical Fiber SFP+	1U Rackmount	• 8.0.3 + Hotfix 1029 or higher • 8.0.4 or higher
F400.F20 Revision C		• 8x 10/100/1000 MBit RJ45 Ethernet ports • 4x 1 GbE Optical Fiber SFP • 2x 10 GbE Optical Fiber SFP+	1U Rackmount	• 8.0.3 + Hotfix 1029 or higher • 8.0.4 or higher
F600.C10 Revision D		• 18x 10/100/1000 MBit RJ45 Ethernet ports	1U Rackmount	• 8.0.1 or higher
F600.C20 Revision D		• 18x 10/100/1000 MBit RJ45 Ethernet ports	1U Rackmount	• 8.0.1 or higher
F600.F10 Revision D		• 10x 10/100/1000 MBit RJ45 Ethernet ports • 8x 1 GbE Optical Fiber SFP	1U Rackmount	• 8.0.1 or higher

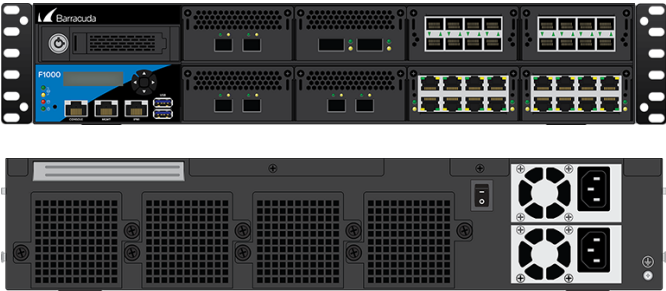
F600.F20 Revision D		• 10x 10/100/1000 MBit RJ45 Ethernet ports • 8x 1 GbE Optical Fiber SFP	1U Rackmount	• 8.0.1 or higher
F600.E20 Revision D		• 10x 10/100/1000 MBit RJ45 Ethernet ports • 8x 1 GbE Optical Fiber SFP • 2x 10 GbE Optical Fiber SFP+	1U Rackmount	• 8.0.1 or higher
F800.CCC Revision C		• 24x 1 GbE RJ45 Ethernet ports	1U Rackmount	• 8.0.1 or higher
F800.CCF Revision C		• 16x 1 GbE RJ45 Ethernet ports • 8x 1 GbE Optical Fiber SFP	1U Rackmount	• 8.0.1 or higher
F800.CCE Revision C		• 16x 1 GbE RJ45 Ethernet ports • 4x 10 GbE Optical Fiber SFP+	1U Rackmount	• 8.0.1 or higher

F900.CCC Revision B		• 32x 1 GbE RJ45 Ethernet ports - Optional network modules available.	1U Rackmount	• 8.0.1 or higher
F900.CCE Revision B		• 16x 1 GbE RJ45 Ethernet ports • 8x 10 GbE Optical Fiber SFP+ - Optional network modules available.	1U Rackmount	• 8.0.1 or higher
F900.CFE Revision B		• 8x 1 GbE RJ45 Ethernet ports • 8x 1 GbE Optical Fiber SFP • 8x 10 GbE Optical Fiber SFP+ - Optional network modules available.	1U Rackmount	• 8.0.1 or higher

F900.CFEQ Revision B		• 8x 1 GbE RJ45 Ethernet ports • 8x 1 GbE Optical Fiber SFP • 4x 10 GbE Optical Fiber SFP+ • 2x 40 GbE QSFP+ Optional network modules available.	1U Rackmount	• 8.0.1 or higher
F1000.CE0 Revision A		• 16x 1 GbE RJ45 Ethernet ports • 4x 10 GbE Optical Fiber SFP+ 4 NIC module bays can load different replaceable Barracuda network modules.	2U Rackmount	• 8.0.1 or higher
F1000.CE2 Revision A		• 32x 1 GbE RJ45 Ethernet ports • 8x 10 GbE Optical Fiber SFP+ 4 NIC module bays can load different replaceable Barracuda network modules.	2U Rackmount	• 8.0.1 or higher

F1000.CFE Revision A		• 16x 1 GbE RJ45 Ethernet ports • 16x 1 GbE Optical Fiber SFP • 8x 10 GbE Optical Fiber SFP+ 4 NIC module bays can load different replaceable Barracuda network modules.	2U Rackmount	• 8.0.1 or higher
F1000.CFEQ Revision A		• 16x 1 GbE RJ45 Ethernet • 16x 1 GbE Optical Fiber SFP • 6x 10 GbE Optical Fiber SFP+ • 2x 40 GbE QSFP+ 4 NIC module bays can load different replaceable Barracuda network modules.	2U Rackmount	• 8.0.1 or higher

F1000.CE0 Revision B		• 16x 1 GbE RJ45 Ethernet ports • 4x 10 GbE Optical Fiber SFP+ 4 NIC module bays can load different replaceable Barracuda network modules.	2U Rackmount	• 8.0.1 or higher
F1000.CE2 Revision B		• 32x 1 GbE RJ45 Ethernet ports • 8x 10 GbE Optical Fiber SFP+ 4 NIC module bays can load different replaceable Barracuda network modules.	2U Rackmount	• 8.0.1 or higher
F1000.CFE Revision B		• 16x 1 GbE RJ45 Ethernet ports • 16x 1 GbE Optical Fiber SFP • 8x 10 GbE Optical Fiber SFP+ 4 NIC module bays can load different replaceable Barracuda network modules.	2U Rackmount	• 8.0.1 or higher

F1000.CEFEQ Revision B		• 16x 1 GbE RJ45 Ethernet • 16x 1 GbE Optical Fiber SFP • 6x 10 GbE Optical Fiber SFP+ • 2x 40 GbE QSFP+ 4 NIC module bays can load different replaceable Barracuda network modules.	2U Rackmount	• 8.0.1 or higher
---	---	--	--------------	-------------------

Figures

1. SC2.front.png
2. FSC2.0.top.png
3. SC3_front.png
4. SC3_Top.png
5. F12.front.png
6. F18b.front.png
7. F80b.back.png
8. F80b.front.png
9. F80b.back.png
10. F82_Front.png
11. F82DSL.A.back_with_Antenna.png
12. F82DSL.B.back_with_Antenna.png
13. F93.R_Front.png
14. F180B.front.png
15. F180B.back.png
16. F193.R_Front.png
17. F280C.front.png
18. F280C.back.png
19. F380B_FrontRack.png
20. F380B_Back.png
21. F400C-Front.png
22. F400C-Rear.png
23. F400C-F20-Front.png
24. F400C-F20-Rear.png
25. F600d.C10_FrontRack.png
26. F600d.10.back.png
27. F600d.C10_FrontRack.png
28. F600d.20.back.png
29. F600d.F10_FrontRack.png
30. F600d.10.back.png
31. F600d.F10_FrontRack.png
32. F600d.20.back.png
33. F600d.E20_FrontRack.png
34. F600d.20.back.png
35. F800c.CCC_FrontRack.png
36. F800c-CCC-Back.png
37. F800c.CCF_FrontRack.png
38. F800c-CCF-Back.png
39. F800c.CCE_FrontRack.png
40. F800c-CCE-Back.png
41. F900b.CCC_FrontRack.png
42. F900b.20.back-01.png
43. F900b.CCE_FrontRack.png
44. F900b.20.back-01.png

- 45. F900b.CFE_FrontRack.png
- 46. F900b.20.back-01.png
- 47. F900b.CFEQ_FrontRack.png
- 48. F900b.20.back-01.png
- 49. F1000.CE0_FrontRack.png
- 50. F1000.back.png
- 51. F1000.CE2_FrontRack.png
- 52. F1000.back.png
- 53. F1000.CFE_FrontRack_40G.png
- 54. F1000.back.png
- 55. F1000.CFEQ_FrontRack.png
- 56. F1000.back.png
- 57. F1000B_CE0.png
- 58. F1000B_back.png
- 59. F1000B_CE2.png
- 60. F1000B_back.png
- 61. F1000B_CFE.png
- 62. F1000B_back.png
- 63. F1000B_CFEQ.png
- 64. F1000B_back.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.