


How to Create Secure Connector Destination NAT Firewall Rules

<https://campus.barracuda.com/doc/91128330/>

To redirect incoming traffic using a specified port to an IP address in another firewall zone, use destination NAT firewall rules. For each rule, you can define the source firewall zone and which TCP and UDP port should be redirected.

Create a Secure Connector Destination NAT Rule

1. Go to **your cluster > Cluster Settings > Secure Connector Editor**.
2. Click **Lock**.
3. Double-click to edit the device or template.
4. In the left menu, click **Firewall Settings**.
5. (Template only) Select the check box for **Destination NAT**. Any existing destination NAT rules on Secure Connectors using this template will be overwritten.
6. Click **+** to add a **Destination NAT** Rule.
7. Enter a **Name** and click **OK**. The **Destination NAT** windows opens.
8. Configure the destination NAT rule:
 - **Source Zone** - Select the source firewall zone.
 - **IP Address** - Enter the target IP address the traffic is redirected to.
 - **TCP Ports** - Click **+** and add the TCP ports that are redirected.
 - **UDP Ports** - Click **+** and add the UDP ports that are redirected.

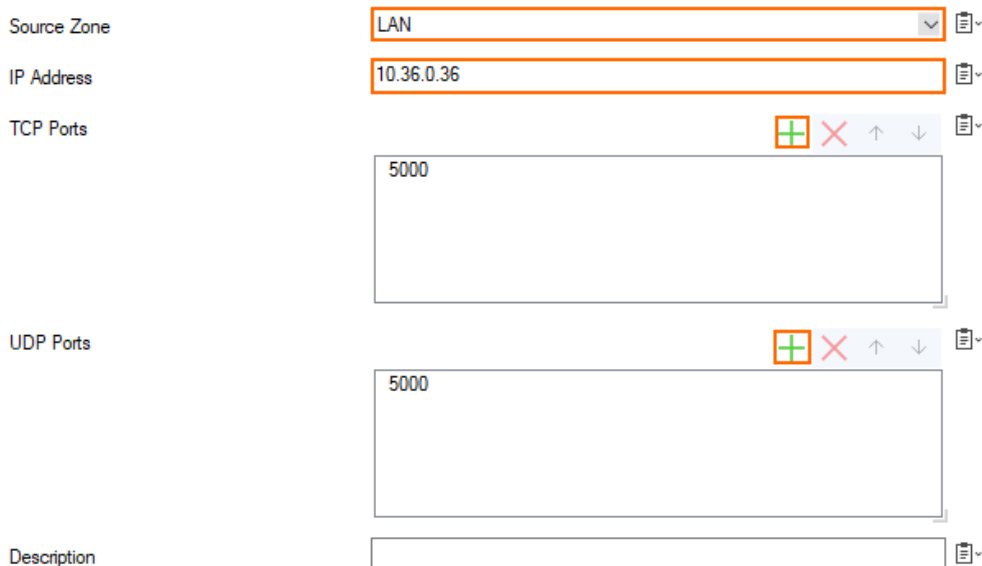

Source Zone: LAN

IP Address: 10.36.0.36

TCP Ports: 5000

UDP Ports: 5000

Description:

9. (optional) Enter a **Description**.
10. Click **OK**.
11. Click **OK** and **Activate**.

Delete a Secure Connector Destination NAT Rule

1. Go to ***your cluster*** > **Cluster Settings** > **Secure Connector Editor**.
2. Click **Lock**.
3. Double-click to edit the device or template.
4. In the left menu, click **Firewall Settings**.
5. In the **Destination NAT** list, select the rule you want to delete.
6. Click **×**.
7. Click **OK** and **Activate**.

Figures

1. fw_dnat01.png
2. delete_icon.png

© Barracuda Networks Inc., 2020 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.