


How to Configure a WWAN

<https://campus.barracuda.com/doc/93195483/>


WAN connections can be configured either during deployment or later through the **SITES** tab. For more information on configuring during deployment, see [How to Create a Site Configuration in Barracuda CloudGen WAN](#).

WAN Configuration


1. Open <https://cloudgenwan.barracudanetworks.com/> in your web browser and log in with your existing Barracuda Cloud Control account.
2. At the top, select the workspace containing your site.

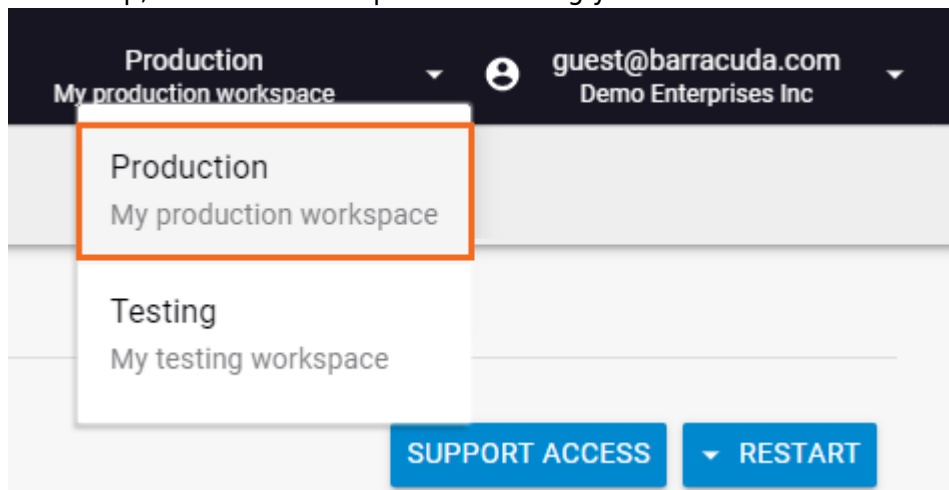

3. Click **SITES**.
4. Select the site you want to edit. You can either search for the name or serial, or use filters to tailor the list of displayed sites. You can also simply scroll through the list.
5. Click on the arrow icon next to site you want to edit.

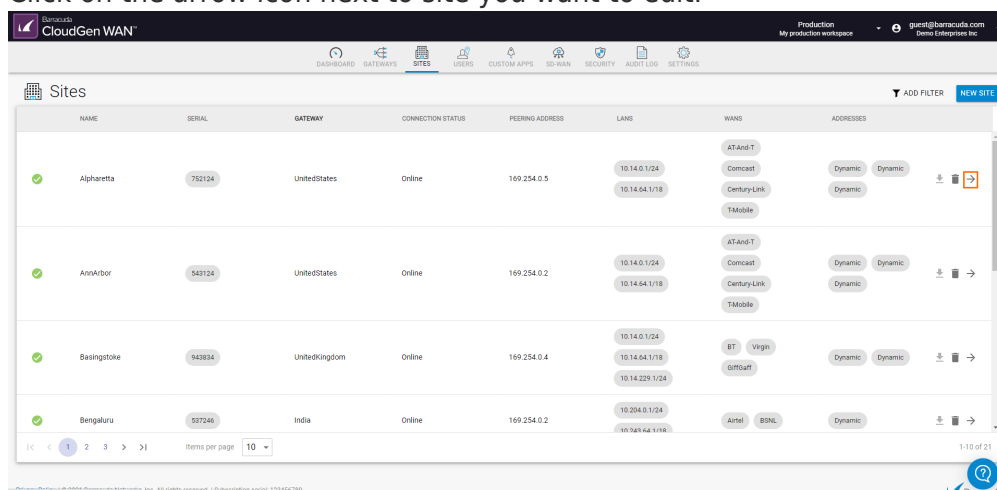

6. In the site menu, go to **SETTINGS > WAN** and click **ADD WAN INTERFACE**.

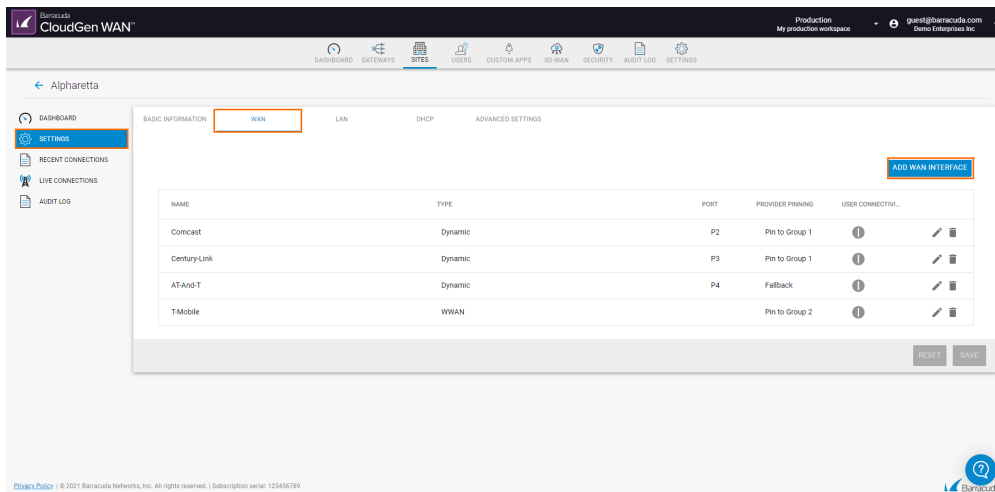

7. The **Add NEW WAN Interface** window opens. Specify values for the following:

- **Name** – Enter a name for your uplink
- **Type** – Select **WWAN** from the drop-down list.
- **Provider Pinning** – Select a provider classification from the drop-down list.
- **SIM Pin** – Enter the PIN code of the installed SIM card.

Add New WAN Interface

Name *

WWAN1

Type

WWAN

Provider Pinning

Fallback

SIM Pin for 77557892

1234

CANCEL

OK

8. Click **OK**.

9. Click **SAVE**.

If you require the PUK code, please contact [Barracuda Networks Technical Support](#). The PUK code is necessary to unlock the SIM card after the PIN code has been entered incorrectly three times.

Figures

1. select_vwan821.png
2. edit_site821.png
3. add_wan821.png
4. wwan.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.