

## Creating Portal User Accounts for Employees

<https://campus.barracuda.com/doc/93197711/>

### Important!

The initial partner credentials you logged in with are a fail-safe account designed for security purposes only.

Upon first logging into ECHOplatform you **must** create an Admin account with which you log in moving forward.


Do **not** use the partner username for regular use.

To create portal user accounts for employees perform the following steps.


Repeat the steps for each MSP user logging into ECHOplatform.

Do not use the default partner credentials used for the initial sign in.


1. At the ECHOplatform ribbon, click **Preferences, Manage Portal Time-Out/Users** from the Preferences drop-down menu.

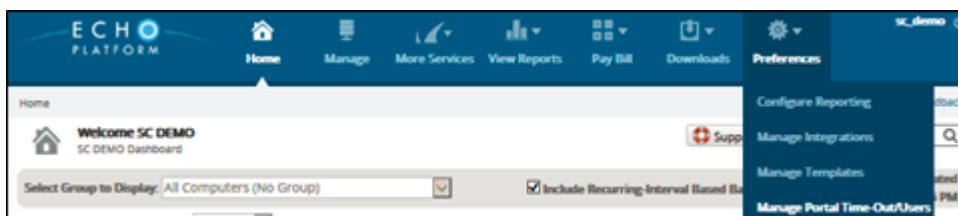

2. Click the **Add User** button.

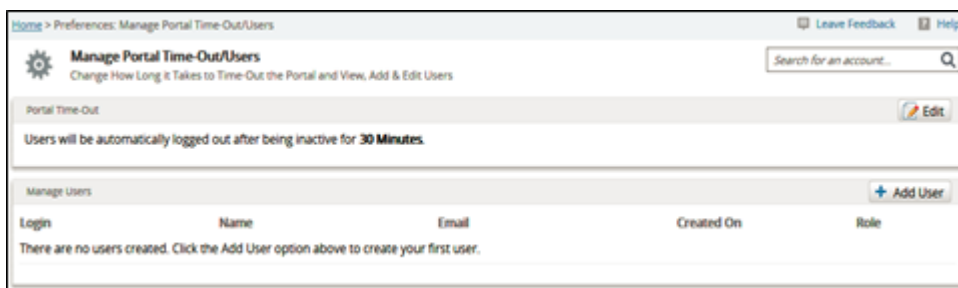


3. Complete the fields.

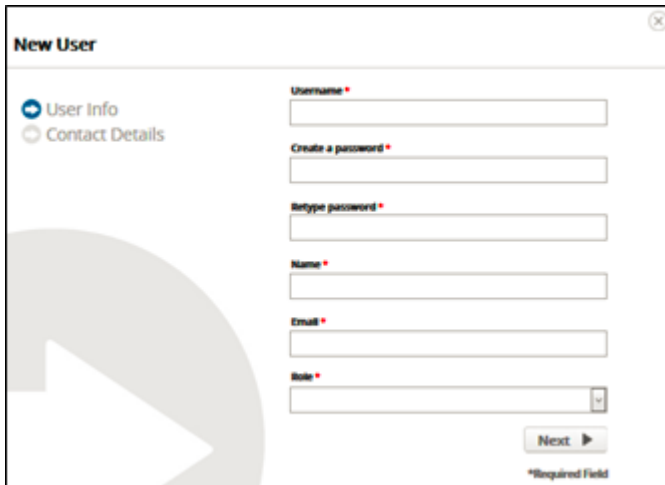


1. Type a unique Username.

If a username is already in use, the following notice is displayed.

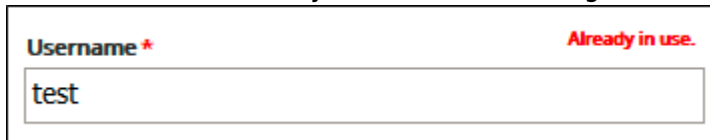

2. Type a password.

The following password requirements are displayed.

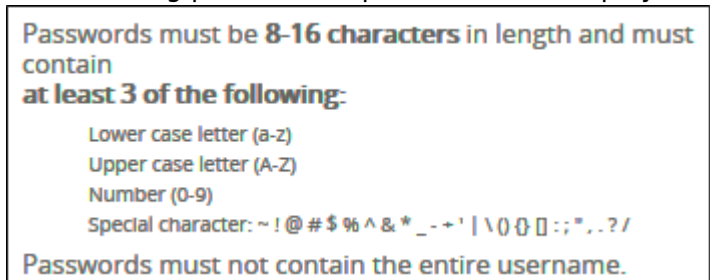

3. Type the Name and Email address in the relevant fields.

If you are using Barracuda Cloud Control, and you already have an account then the email address and password need to match the Barracuda login.

4. Select a role from the Role drop-down list. The roles are:

#### **Admin**

- Access to all features of the ECHOplatform portal
- Full privileges to Barracuda Cloud Control.
- The user can Single-sign-On into Barracuda Cloud Control.
- The user can activate Barracuda Backup Appliances
- The user can provision and activate Barracuda Essential Services

#### **Tech**


- Access to the ECHOplatform portal management section and backup related reporting
- Full privileges to Barracuda Cloud Control except for search ability in Archiver
- The user can Single-Sign-On into Barracuda Cloud Control.
- The user **cannot** activate Barracuda Backup Appliances
- The user **cannot** provision and activate Barracuda Essential Services

#### **Tech (Cannot Delete)**

- Access to the ECHOplatform portal management section and backup related reporting, but cannot delete
- Access to Barracuda Cloud Control
- The user **cannot** activate Barracuda Backup Appliances
- The user **cannot** provision and activate Barracuda Essential Service

### Finance


- Access to the ECHOplatform portal billing section and billing related reporting.
- No access to Barracuda Cloud Control
- The user **cannot** activate Barracuda Backup Appliances
- The user **cannot** provision and activate Barracuda Essential Service

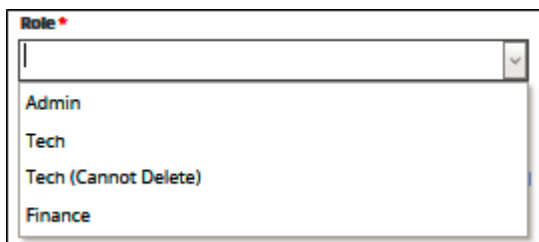

A screenshot of a dropdown menu titled "Role" with a red asterisk. The menu is open, showing four options: "Admin", "Tech", "Tech (Cannot Delete)", and "Finance".

4. When complete, click **Next**.

The Contact Details page is displayed with pre-filled fields.

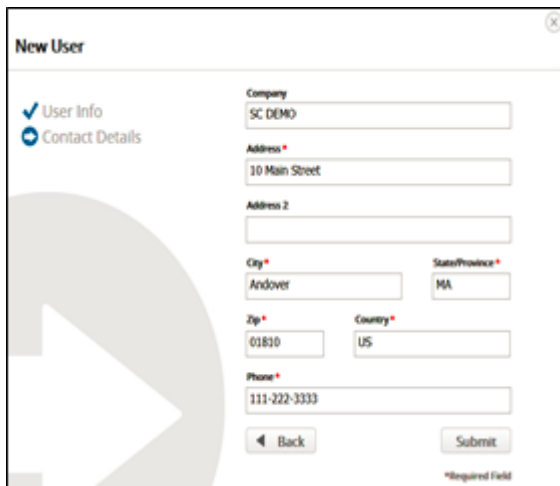


A screenshot of the "New User" form, specifically the "Contact Details" section. The form is pre-filled with the following information:

- Company: SC DEMO
- Address: 10 Main Street
- Address 2: (empty)
- City: Andover
- State/Province: MA
- Zip: 01810
- Country: US
- Phone: 111-222-3333

At the bottom of the form, there are "Back" and "Submit" buttons. A legend indicates that fields with a red asterisk are required.

5. Click Submit.

The new user is displayed.

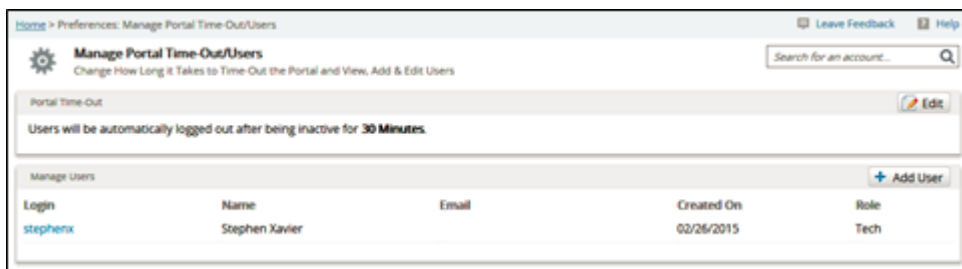

If an employee User Account was created in Barracuda Cloud Control prior to creating/synchronizing the account in ECHOplatform, after the account is synchronized, the user can access all Barracuda MSP customer accounts in Barracuda Cloud Control.

This happens irrelevant of whether they had access to all the accounts prior to the account being synchronized.

## Figures

1. image2021-2-26 8:27:17.png
2. image2021-2-26 8:43:59.png
3. image2021-2-26 8:40:35.png
4. image2021-2-26 8:45:14.png
5. password requirements
6. User Roles
7. New User fields completed
8. New user displayed

© Barracuda Networks Inc., 2021 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.