

How to Create Access Rules for Site-to-Site VPN Access

https://campus.barracuda.com/doc/96026142/

After configuring a VPN tunnel between two Barracuda CloudGen Firewalls, you must create a Pass access rule on both systems to allow traffic through the VPN tunnel.

Create this access rule on both local and remote CloudGen Firewalls.


Before You Begin

• Configure a TINA or IPsec Site-to-Site VPN tunnel. For more information, see <u>How to Create a TINA VPN Tunnel between CloudGen Firewalls or How to Configure a Site-to-Site VPN with IPsec</u>.

Create an Access Rule Allowing Traffic into and out of the VPN Tunnels

- Go to CONFIGURATION > Configuration Tree > Box > Assigned Services > Firewall >
 Forwarding Rules.
- 2. Click Lock.
- 3. Right-click on the ruleset and select **New**. The **New Rule** window opens.
- 4. Enter a Name. E.g., LAN-2-VPN-SITE
- 5. Right-click the ruleset and select **New > Rule** to create an access rule to match the VPN traffic:
 - Action Select Pass.
 - **Bi-Directional** Select the check box to apply the rule in both directions.
 - Source Enter all local networks used for the VPN tunnel.
 - Service Select the services allowed to access the tunnel. Default: Any
 - Destination Enter the remote networks behind the VPN tunnel, or select
 VPN Networks.
 - Connection Method Select Original Source IP.



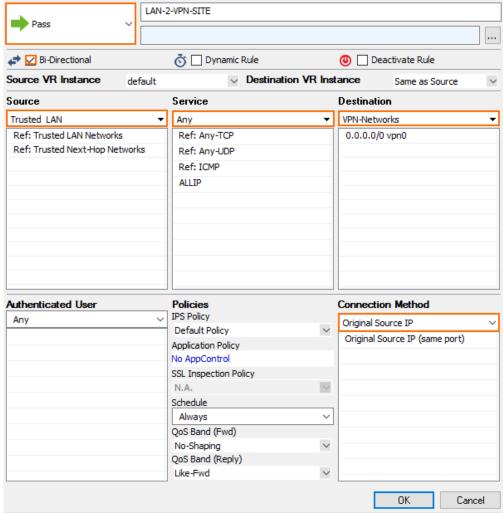

- 6. Click OK.
- 7. Reorder the access rule by dragging it to the correct position in the forward firewall's ruleset. Make sure no access rule placed above it will match the traffic for the site-to-site access rule.
- 8. Click **Send Changes** and **Activate**.

Barracuda CloudGen Firewall



Figures

1. VPN_Access_rule01.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.