


Integrating Barracuda Impersonation Protection

<https://campus.barracuda.com/doc/96767770/>

1. Sign in to **Barracuda Impersonation Protection**.
2. Click the **Settings** gear icon in the top right, then click the **Syslog Integration** tab.
3. Check the **Enabled** box.
4. In **IP Address/Hostname** box, enter `barracuda-sentinel.skout-build.com`.
5. Leave the default `6514` value for port.
6. Click **Save**.
7. While still in the **Impersonation Protection** app, take note of the UUID Portion of the URL in your browser's location bar. For example:
If the url is
`https://sentinel.barracudanetworks.com/report/xxxx-1234-5678-abcd-zzzz/dashboard`, then the `xxxx-1234-5678-abcd-zzzz` portion is the id.

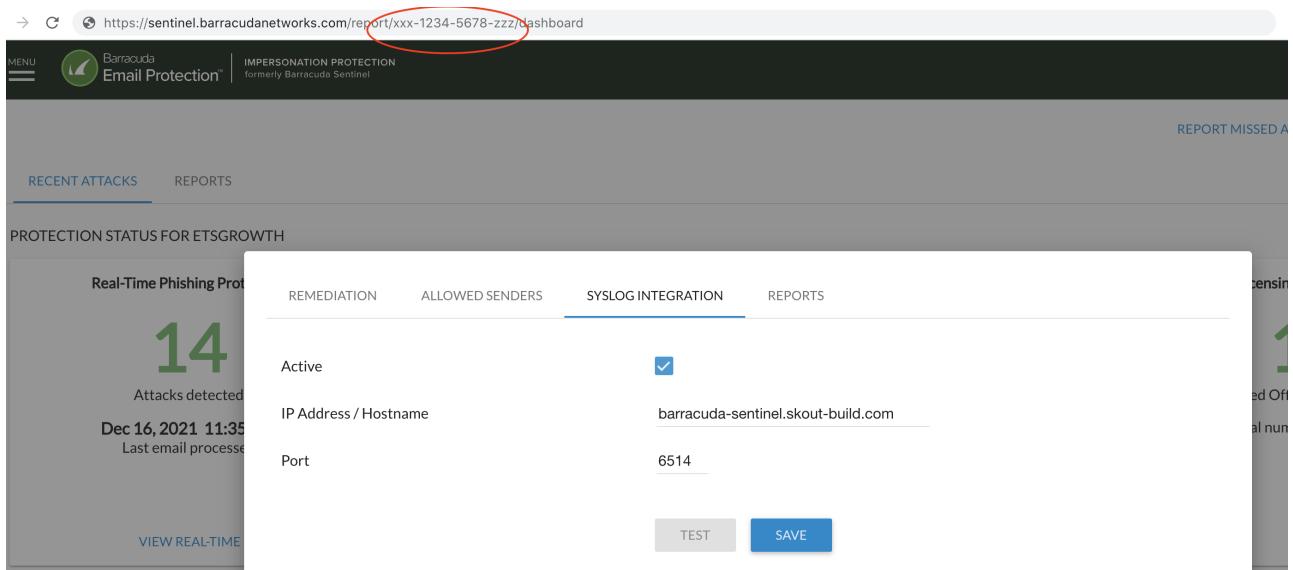

The screenshot shows the Barracuda Email Protection dashboard. At the top, there is a navigation bar with a magnifying glass icon, a refresh icon, and the URL `https://sentinel.barracudanetworks.com/report/xxxx-1234-5678-abcd-zzzz/dashboard`. Below the navigation bar, the page title is "Barracuda Email Protection" and "IMPERSONATION PROTECTION formerly Barracuda Sentinel". On the left, there are tabs for "RECENT ATTACKS" and "REPORTS", with "RECENT ATTACKS" being the active tab. In the center, there is a section titled "PROTECTION STATUS FOR ETSGROWTH" with a summary card showing "Real-Time Phishing Protection" with 14 attacks detected, the date "Dec 16, 2021 11:35", and the text "Last email processed". Below this card, there is a table with four rows: "Active" (status), "IP Address / Hostname" (value `barracuda-sentinel.skout-build.com`), "Port" (value `6514`), and two buttons at the bottom right: "TEST" and "SAVE".

8. In **Barracuda XDR Dashboard**, click **Administration > Integrations > Barracuda Impersonation Protection**.
9. In **Tenant ID**, enter the id.
10. Check the **Enabled** box.
11. Click **Save**.

Figures

1. 1.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.