

## How to Change Control Center Credentials for Non-Root Admins


<https://campus.barracuda.com/doc/79463191/>

In the Barracuda Firewall Admin settings, you can configure the password and key for non-root admins of a Control Center.

### Change the Password for Non-root Admins

Change the password used to authenticate when connecting to a Control Center.

1. In the top left of Barracuda Firewall Admin, click **OPTIONS** and select **Settings**.
2. Expand **Admin and CC Settings**.
3. Click the list below the **Admin and CC Settings** and select **Change Admin Credentials for CC Admin**.
4. In the **CC Selection** section, select the Control Center from the **CC** drop-down list.
5. Select the Control Center IP address from the **Address** drop-down list.
6. In the **Change Administrator Password** section, enter:
  - o **Login Name**
  - o **Old Password**
  - o **New Password** and **Confirm**

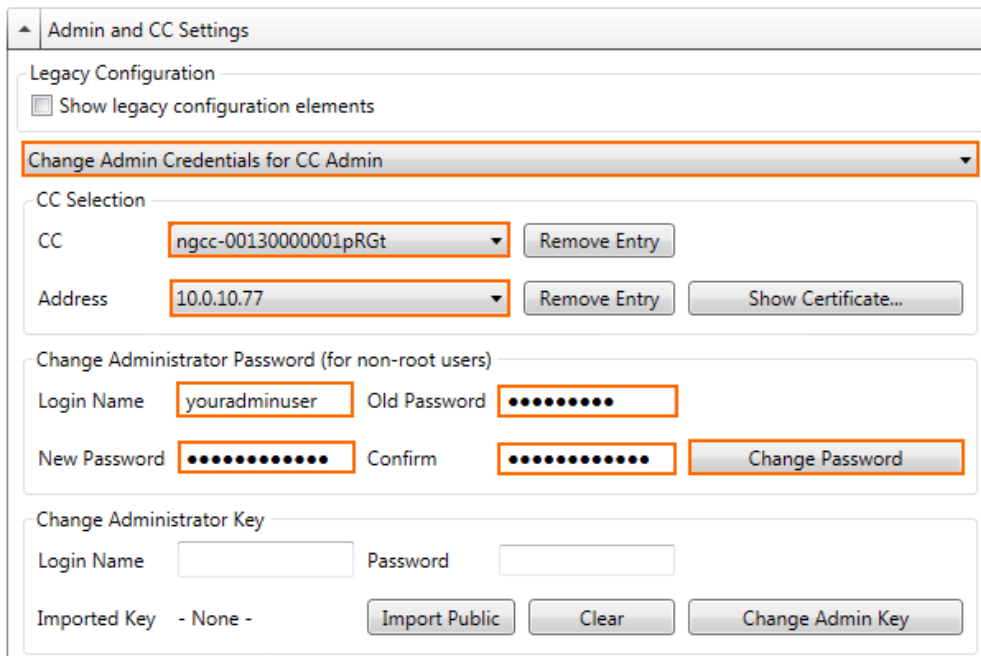


The screenshot shows the 'Admin and CC Settings' configuration page. The 'Change Admin Credentials for CC Admin' option is selected in a dropdown menu. Below this, the 'CC Selection' section contains two dropdown menus: 'CC' (set to 'ngcc-00130000001pRGt') and 'Address' (set to '10.0.10.77'). The 'Change Administrator Password (for non-root users)' section has four input fields: 'Login Name' (set to 'youradminuser'), 'Old Password' (masked with dots), 'New Password' (masked with dots), and 'Confirm' (masked with dots). A 'Change Password' button is located to the right of the 'Confirm' field. At the bottom, the 'Change Administrator Key' section includes 'Login Name' and 'Password' input fields, an 'Imported Key' dropdown (set to '- None -'), and 'Import Public', 'Clear', and 'Change Admin Key' buttons.

7. Click **Change Password**.

### Change the Administrator Key for Non-root Admins

Change the client certificate used to authenticate when connecting to a Control Center.

1. In the top left of Barracuda Firewall Admin, click **OPTIONS** and select **Settings**.
2. Expand **Admin and CC Settings**.
3. Click the list below the **Admin and CC Settings** and select **Change Admin Credentials for CC Admin**.
4. In the **CC Selection** section, select the Control Center from the **CC** drop-down list.
5. Select the Control Center IP address from the **Address** drop-down list.
6. In the **Change Administrator Key** section, enter the **Login Name** and **Password**.
7. Click **Import Public** and upload the new certificate.

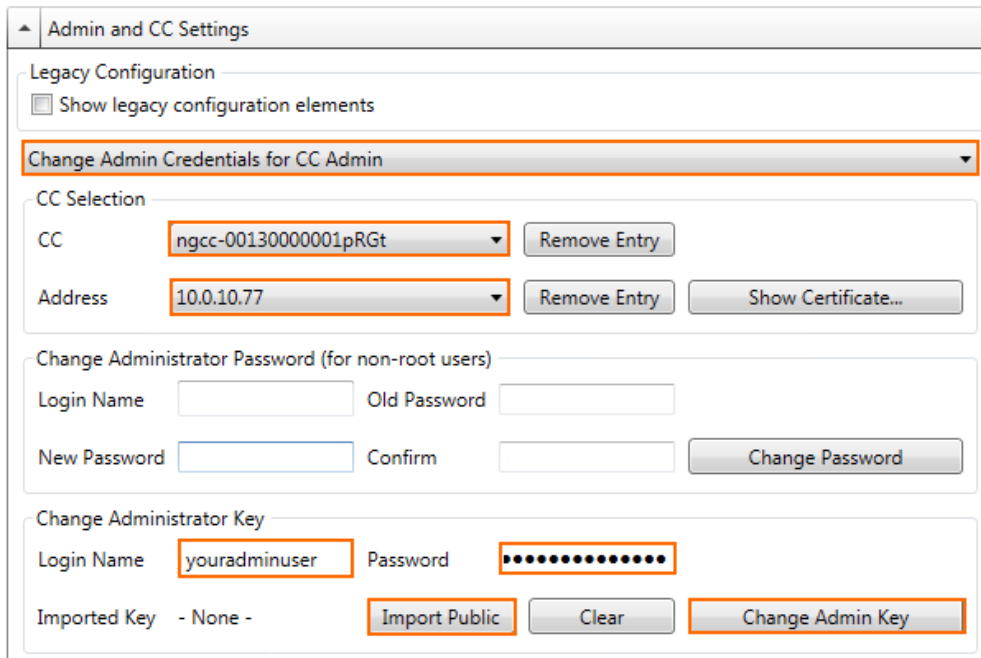

Admin and CC Settings

Legacy Configuration

Show legacy configuration elements

Change Admin Credentials for CC Admin

CC Selection

CC

Address

Change Administrator Password (for non-root users)

Login Name  Old Password

New Password  Confirm

Change Administrator Key

Login Name  Password

Imported Key - None -

8. Click **Change Admin Key**.

## Figures

1. CC\_Admin\_password\_01.png
2. CC\_Admin\_password\_02.png

© Barracuda Networks Inc., 2019 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.