


Disabling AutoClose for SQL Databases

<https://campus.barracuda.com/doc/93198918/>

This short guide will show you how to turn off AutoClose for a SQL database. AutoClose must be disabled on a per-database basis and must be disabled in order for the Intronis software to back up those databases.

Directions

1. Open SQL Server Management Studio.
2. Log into the SQL instance containing the database you want to back up.
3. Expand the **Databases** folder to show the database you want.
4. Right-click the database and select **Properties**.
5. In the **Properties** window, select the **Options** page on the left.
6. Then, under the **Automatic** section, change the **Auto Close** value to **False**.

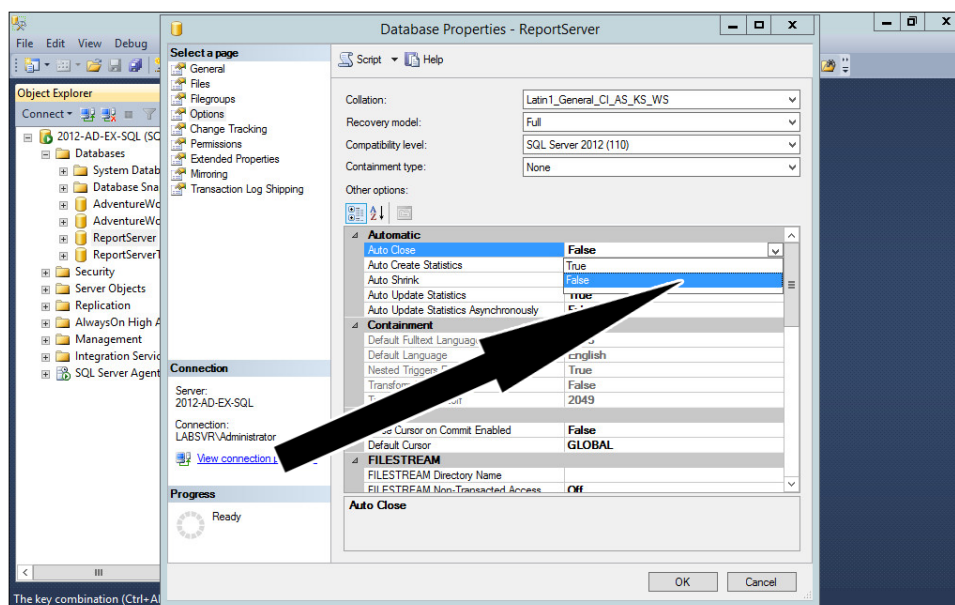

7. Hit **OK** to save the change.

Figures

1. autoclosefalse2.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.