


## How to Configure Google Directory Authentication

<https://campus.barracuda.com/doc/96768281/>

OIDC authentication can be configured for enrolling devices through a specific identity provider.

### Configure Google Directory Authentication

1. Go to **Identity > Settings**.
2. In the **Authentication Protocol** section, click **Activate Provider**.

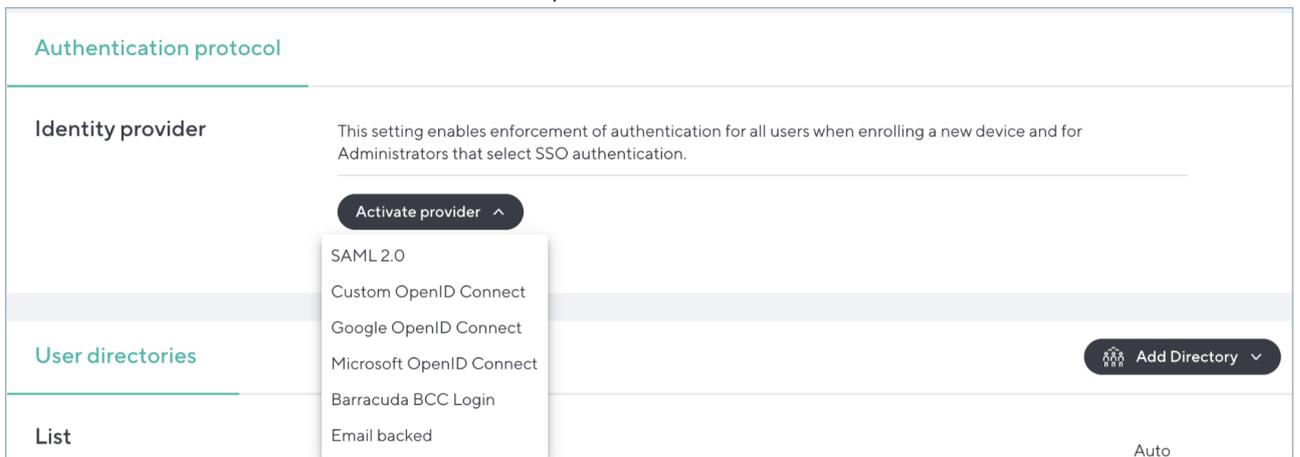

The screenshot shows the 'Authentication protocol' settings page. The 'Identity provider' section is active, displaying a description: 'This setting enables enforcement of authentication for all users when enrolling a new device and for Administrators that select SSO authentication.' Below this is a dropdown menu labeled 'Activate provider' with an upward arrow. The dropdown menu is open, showing the following options: SAML 2.0, Custom OpenID Connect, Google OpenID Connect, Microsoft OpenID Connect, Barracuda BCC Login, and Email backed. To the right of the dropdown is an 'Add Directory' button with a downward arrow. Below the 'Activate provider' dropdown is a 'User directories' section with a 'List' button and an 'Auto' setting.

3. Click on *Google OpenID Connect*.

## Figures

### 1. ActivateProvider.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.