

How to Configure Apple iOS Devices for Client-to-Site IPsec VPNs with PSK

<https://campus.barracuda.com/doc/43846968/>

For connections to client-to-site IPsec VPNs with PSK, you can use Apple iOS devices. Follow the steps in this article to configure and use Apple iOS devices for IPsec VPN connections with the Barracuda NG Firewall.



In this article:

Configure the Apple iOS Device

Before you configure the Apple iOS device:

- Verify that the Apple device is running iOS version 5.1 or above.
- Verify that a client-to-site IPsec VPN with PSK has been properly configured. For more information, see [How to Configure a Client-to-Site IPsec VPN with PSK](#).

To configure an Apple iOS device for IPsec VPN connections with the Barracuda NG Firewall:


1. On the Apple iOS device, tap **Settings > General > VPN > Add VPN Configuration**.
2. On the **Add VPN configuration** screen, tap the **IPSec** tab.
3. Configure the following settings:
 - **Server** – The IP address or FQDN that the VPN service is listening on (e.g., 10.0.0.2).
 - **Account** and **Password** – Enter the username and password.
 - **Secret** – Enter the PSK.
 - **Group Name** – Enter the group policy name you entered for the IPsec PSK VPN on the Barracuda NG Firewall (e.g., IPsecPSKGroupPolicyName). For more information, see

Step 3 in [How to Configure a Client-to-Site IPsec VPN with PSK](#)

4. Tap **Save** in the top right corner. The VPN configuration then appears on the **VPN** screen.

Cancel **Add Configuration** **Save**

L2TP PPTP **IPSec**



Description IPSec PSK

Server 10.0.0.2

Account username

Password ●●●●●●●●


Use Certificate

Group Name IPSecPSKGroupPolicyName

Secret ●●●●●●●●

PROXY

Off Manual Auto

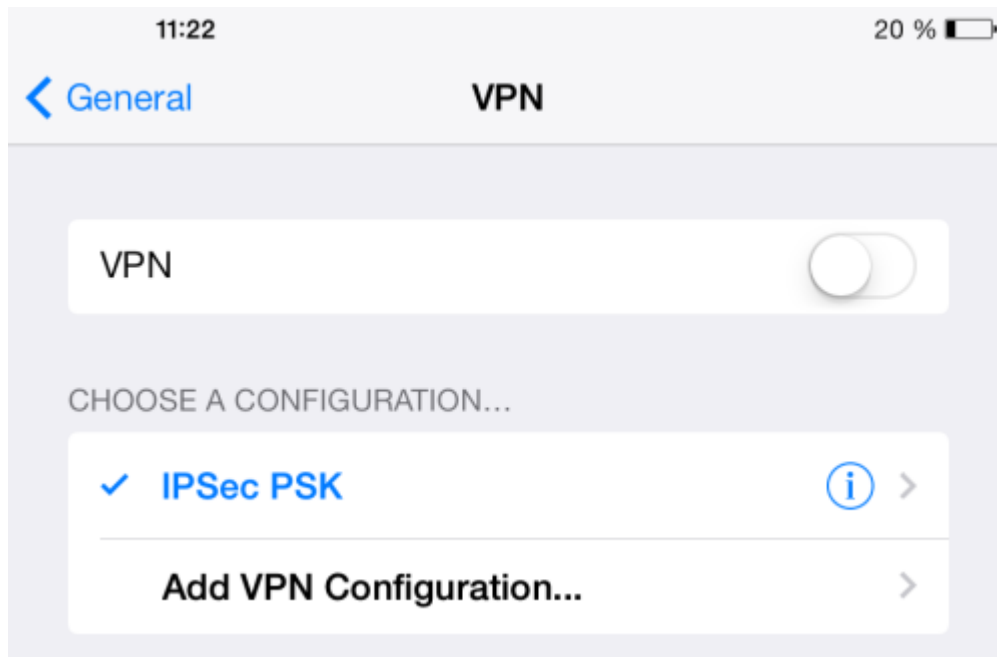

Connect to the VPN with the Apple iOS Device

After configuring the Apple device, you can connect to the IPsec VPN.

On your Apple iOS device, tap **Settings** and then turn on **VPN**. After a few seconds, the VPN icon appears in the status bar to indicate that the connection is successful.

Establishing VPN through NAT can be problematic. If you experience connection losses, increase the UDP timeout on the NAT'd device. For example, the iPhone sends keepalive packets every 60 seconds. To increase the UDP timeout for the iPhone, enter any value over 60 seconds.

Unfortunately, many cell phone providers use NAT to connect mobile devices to the Internet. Contact your cell phone provider support for help.

Figures

1. Client2SiteiOS.png
2. iOSiPadminiVPNclient.png
3. iOSiPadminiVPNOverview.png

© Barracuda Networks Inc., 2019 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.