


How to Configure BGP for Inbound Link Failover

https://campus.barracuda.com/doc/96026051/

BGP is used to announce routes to the neighboring networks. If you are using two or more ISPs to connect to the Internet, you can configure BGP to propagate routes for both ISPs to the neighboring networks. The remote BGP service monitors the neighboring connections and automatically chooses the other link when one link goes down. All traffic for your network is then routed over the remaining link.

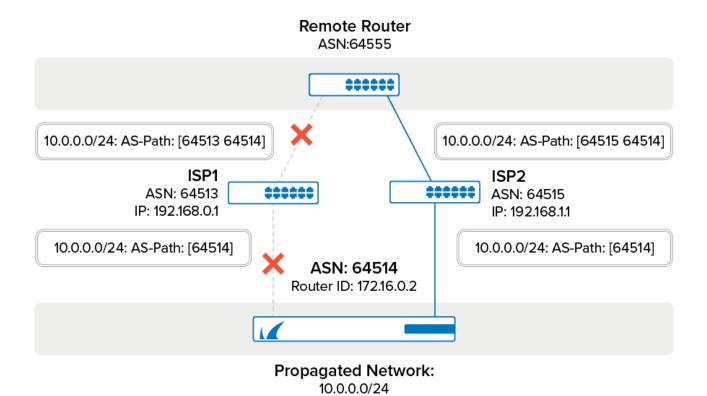

Before You Begin

Before you configure the BGP service, you need an AS number for your network. AS numbers from 64512 to 65534 and 4,200,000,000 to 4,294,967,295 are reserved for private use.

Step 1. Enable the BGP Service

Create and configure the BGP service.



- Create a OSPF/RIP/BGP Service. For more information on how to create a service, see <u>How to Assign Services</u>.
- 2. Go to CONFIGURATION > Configuration Tree > Box > Assigned Services > OSPF-RIP-BGP-Service > OSPF/RIP/BGP Settings.
- 3. Click Lock.
- 4. From the Run BGP Router list, select yes.
- 5. From the **Operation Mode** list, select **advertise-learn**.
- 6. In the Router ID field, enter the IP address of the router.
- 7. Click Send Changes and Activate.

Step 2. Configure the BGP Service

- 1. Go to CONFIGURATION > Configuration Tree > Box > Assigned Services > OSPF-RIP-BGP-Service > OSPF/RIP/BGP Settings.
- 2. In the left menu, click on **BGP Router Setup**.
- 3. Enter the **AS Number** for your network.
- 4. In the **Terminal Password** fields, specify a password for connecting to the BGP router service via telnet from the shell of the Barracuda CloudGen Firewall.
- 5. In the **Networks** table, add the local subnet (e.g., 10.0.0.0/24).
 - 1. Click the plus sign (+).
 - 2. Enter a **Name** for the network and click **OK**.
 - 3. In the **Network Prefix** field, enter the subnet. This is the subnet which is propagated via BGP (e.g., 10.0.0.0/24).
 - 4. Click **OK**.
- 6. Click **Send Changes** and **Activate**.

Step 3. Create a BGP Neighbors for ISP 1 and ISP 2

- 1. Go to CONFIGURATION > Configuration Tree > Box > Assigned Services > OSPF-RIP-BGP-Service > OSPF/RIP/BGP Settings.
- 2. In the left menu, click **Neighbor Setup IPv4**.
- 3. Click Lock.
- 4. In the **Neighbors** table, create a BGP neighbor for each ISP:
 - 1. Click the plus sign (+).
 - 2. Enter a **Name** for the ISP (e.g., ISP1bgpNeighbor or ISP2bgpNeighbor).
 - 3. In the **Neighbors** window, specify the following settings:
 - Neighbor IPv4 Enter the IP address of the BGP neighbor (e.g., 192.168.0.1 or 192.168.1.1).
 - OSPF Routing Protocol Usage Select no.
 - RIP Routing Protocol Usage Select no.
 - BGP Routing Protocol Usage Select yes.
 - AS Number Enter the AS number that is assigned to the BGP neighbor (e.g.,




64513 or 64515).

- Update Source Select Address.
- Update Source IPv4 Address Enter the IP address that is assigned to the ISP WAN interface.
- 4. Click **OK**.
- 5. Click Send Changes and Activate.

Monitoring BGP Routes

To monitor the routes that are learned and propagated by BGP, go to the **CONTROL** > **Network** page and click the **BGP** tab.

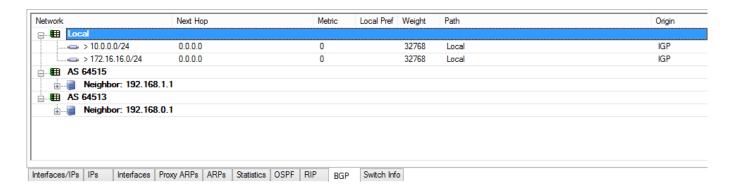

Barracuda CloudGen Firewall



Figures

- 1. bgp_to_isp_failover.png
- 2. BGPmonitoring.png

© Barracuda Networks Inc., 2024 The information contained within this document is confidential and proprietary to Barracuda Networks Inc. No portion of this document may be copied, distributed, publicized or used for other than internal documentary purposes without the written consent of an official representative of Barracuda Networks Inc. All specifications are subject to change without notice. Barracuda Networks Inc. assumes no responsibility for any inaccuracies in this document. Barracuda Networks Inc. reserves the right to change, modify, transfer, or otherwise revise this publication without notice.